


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

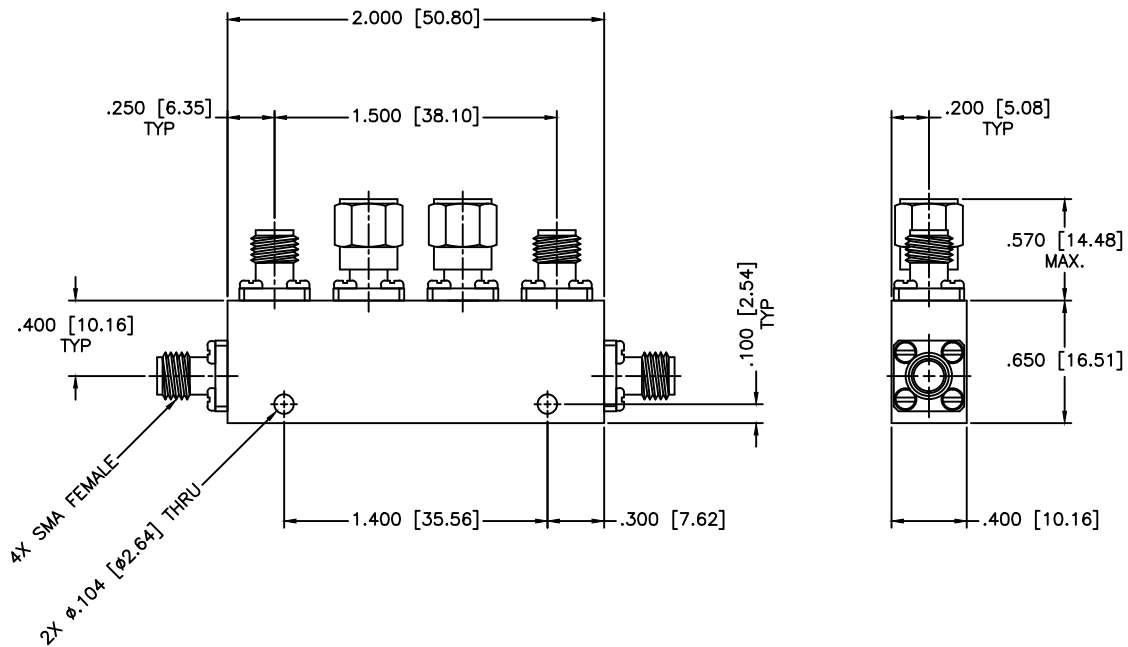

SPECIFICATIONS

Frequency Range: 7–12.4 GHz
 VSWR: 1.40:1 Max.
 Insertion Loss: 0.30dB Max.
 Directivity: 17dB Max.
 Frequency Sensitivity: \pm 0.5dB
 Coupling: 20 \pm 1.0dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .02 \pm .009 ANGLE: \pm 1/2°		DRAWING TITLE: DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO.: DC6-20	
DATE: 11-23-1997		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 11-23-1997	
THIRD ANGLE PROJECTION		SIZE: A	
		REV: N/A	
		DWG NO.: 80623	
DO NOT SCALE THE DRAWING			