


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

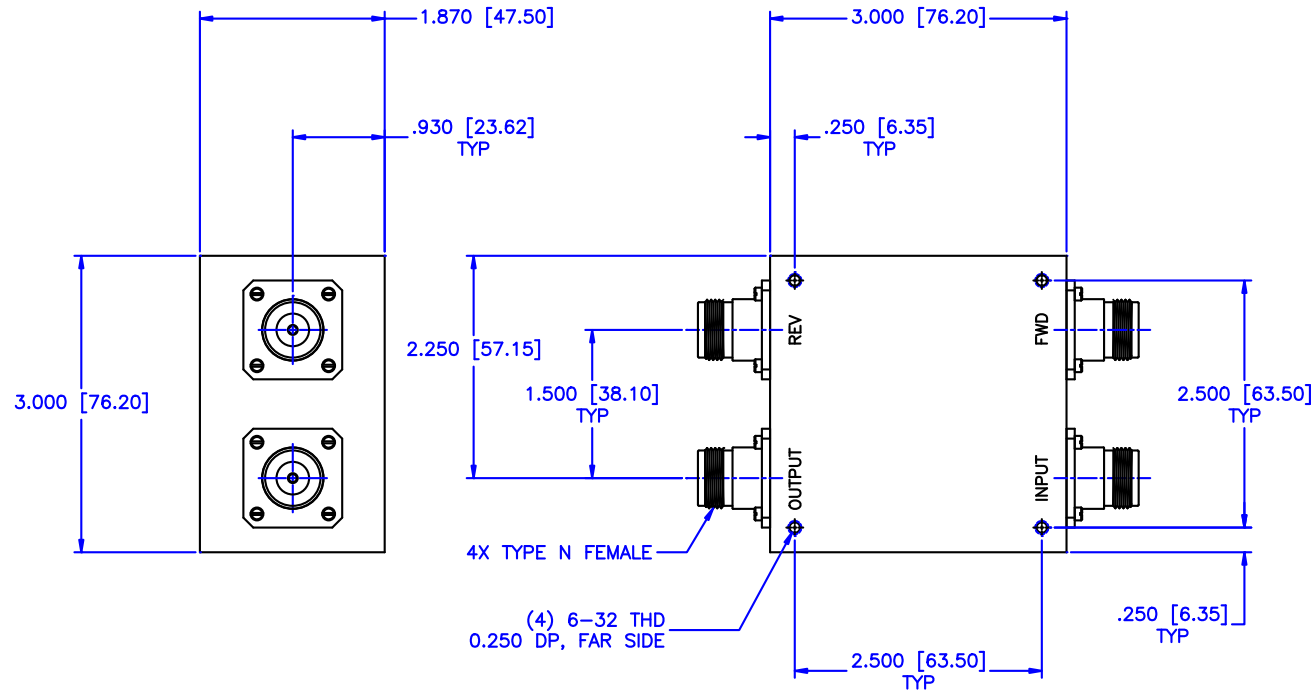

SPECIFICATIONS

FREQUENCY RANGE: 2–32 MHz  
 COUPLING: 20dB ±1.0dB Nom.  
 FLATNESS: ±0.50dB Max.  
 INSERTION LOSS: 0.2dB Max.  
 DIRECTIVITY: 20dB Min.  
 VSWR PRIME LINE: 1.25:1 Max.  
 POWER: 200 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
DRAWN: Paiboon Luekhamhan		DATE: 08-05-2011		SHEET: N/A
APPROVED: T. Nguyen		DATE: 08-05-2011		DRAWING TITLE: HIGH POWER BI-DIRECTIONAL COUPLER
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		PART NO. HDL-18-20		
CAGE CODE: OD2L5		SIZE: C	REV: N/A	DWG NO. 85807
DO NOT SCALE THE DRAWING				

