




Standards  
NF C 96-315  
MIL-DTL-3933

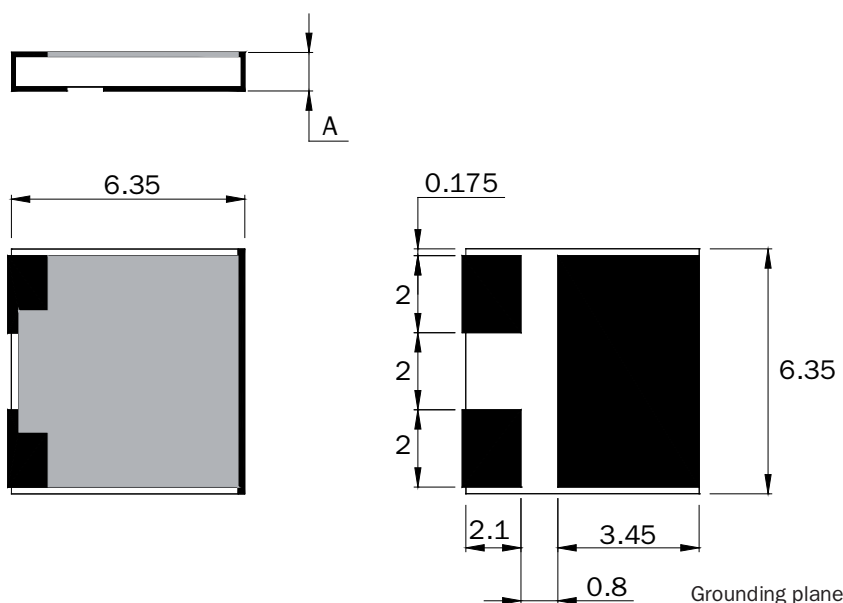

Substrate	Al <sub>2</sub> O <sub>3</sub>
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Tin over Nickel barrier



Dimensions in mm

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance (Ω ± 5%)	Max VSWR	Accuracy ±Δα (dB)	A (mm)
46-0013S	2	2	3	50	1.20	0.3	0.635
40-0336S	3	2	3	50	1.20	0.3	0.635
46-0008S	6	2	3	50	1.20	0.3	0.635
46-0009S	10	2	3	50	1.20	0.5	0.635
46-0014S	20	2	3	50	1.20	0.6	0.635
46-0022S	30	2	3	50	1.20	0.8	0.381

mm	inch
0.175	0.007
0.381	0.015
0.635	0.025
0.8	0.031
2	0.079
2.1	0.083
3.45	0.136
6.35	0.250

\* Others values on request

Available on Tap and Reel Packaging