

# MINI SMP-F TERMINATION 40 GHZ

ST4077


## SPECIFICATIONS

### ELECTRICAL:

FREQUENCY: 0-40 GHZ  
IMPEDANCE: 50 OHMS  
VSWR 1.45:1 MAX @ 40GHZ

### MECHANICAL:

MATERIAL BODY: BeCu  
CENTER CONTACTS: BeCu  
PLATING: Au PER MIL-G-45204  
INSULATOR: PTFE  
OP. TEMP RANGE: -55° to +125°C  
ROHS COMPLIANT

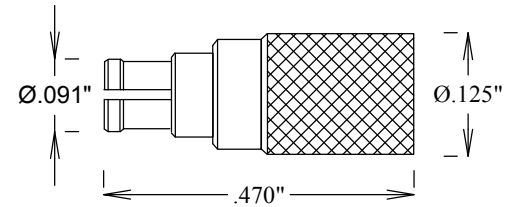

**FAIRVIEW MICROWAVE INC.**  
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**MINI SMP-F TERMINATION 40 GHZ**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>ST4077</b>	--

SCALE

SHEET