


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

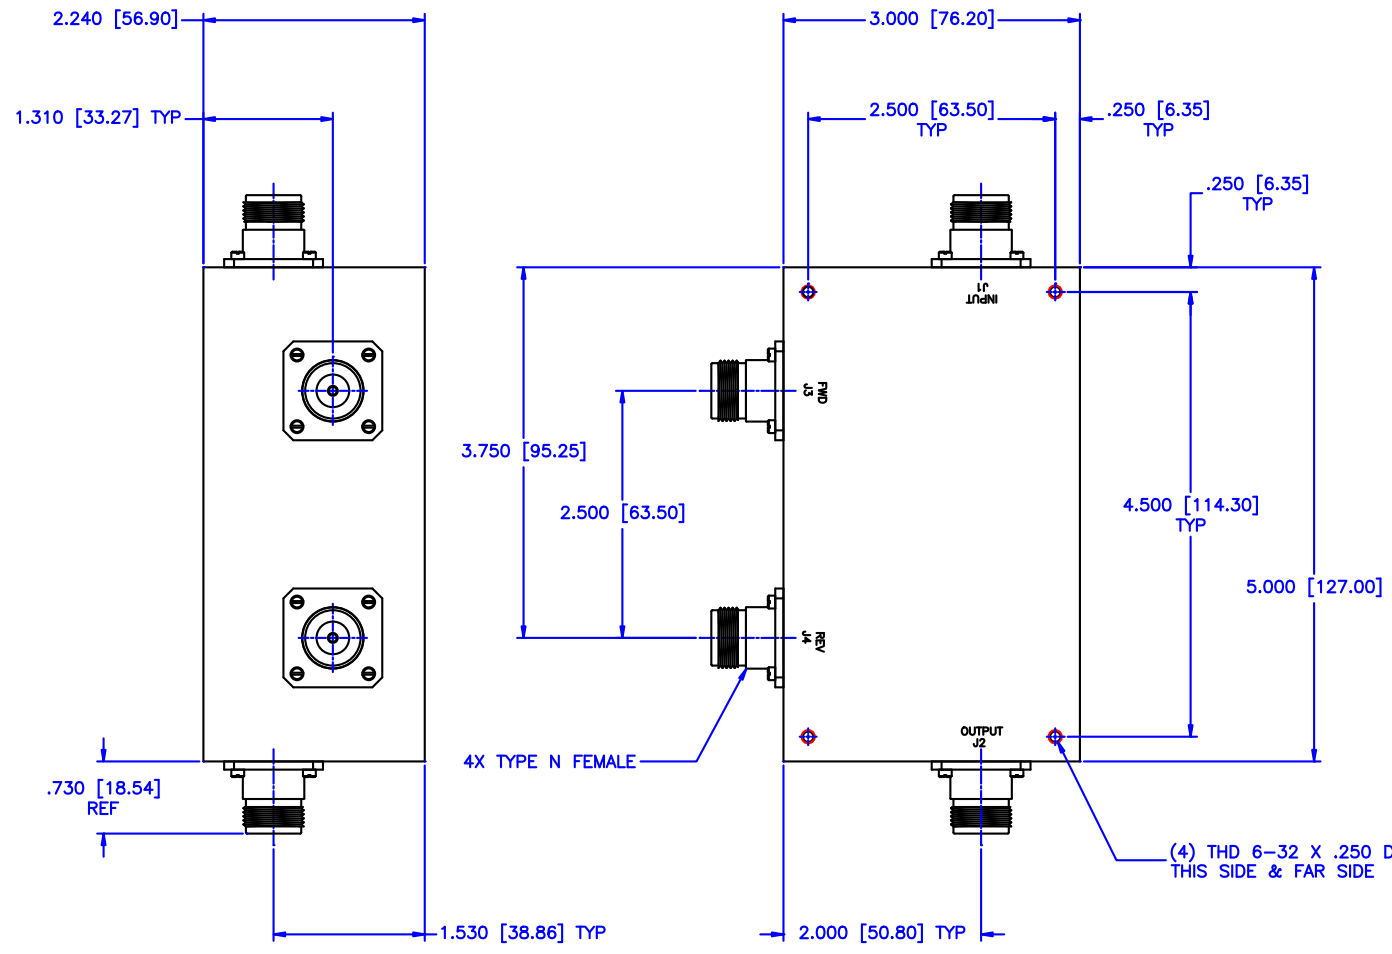

**SPECIFICATIONS**

- FREQUENCY RANGE: 0.01–250 MHz
- FREQUENCY SENSITIVITY:  $\pm 0.50$ dB
- INSERTION LOSS: 0.50dB Max.
- DIRECTIVITY: 20dB Min.
- VSWR PRIME LINE: 1.10:1 Max.
- POWER: 250 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7225 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE: N/A
			SHEET: N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER	
PART NO.:		HDL-6-50	
DRAWING: Paboon Luekhamhan	DATE: 03-26-1999	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 03-26-1999	REV: N/A	DWG NO. 81238
		DO NOT SCALE THE DRAWING	