

# SMA F/F ADAPTER 18GHZ BRASS

SM7555

## SPECIFICATIONS

### ELECTRICAL

50 OHMS

VSWR 1.20:1 MAX @ 12 GHZ

1.4:1 MAX @ 18GHZ

FREQUENCY: 0-18 GHZ

MATERIALS BODY: BRASS, AU PLATED, 3  $\mu$ " MIN

CENTER CONTACTS BECU, Au PLATED, 50  $\mu$ " MIN

INSULATOR: TEFLON


INTERFACE: MIL-STD-348A

ROHS COMPLIANT


OP TEMP: -45-100° C

SMA JACK


.217" ACROSS  
(2) FLATS  
(5.5)



SMA JACK



MEASUREMENTS BELOW ARE TYPICAL

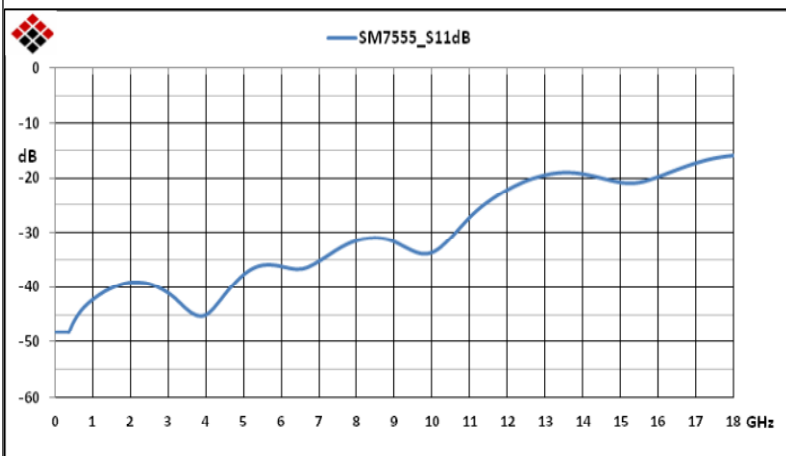

ALL DIMENSIONS IN inches(MM) Typical

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 [WWW.FAIRVIEWMICROWAVE.COM](http://WWW.FAIRVIEWMICROWAVE.COM)

TITLE

**SMA F/F ADAPTER 18GHZ BRASS**

SIZE

**A**

CAGE CODE

**3FKR5**

DWG NO

**SM7555**

REV

**A**

SCALE

SHEET