



WR-112 WAVEGUIDE 50W HIGH POWER TERMINATION – RFWT112A

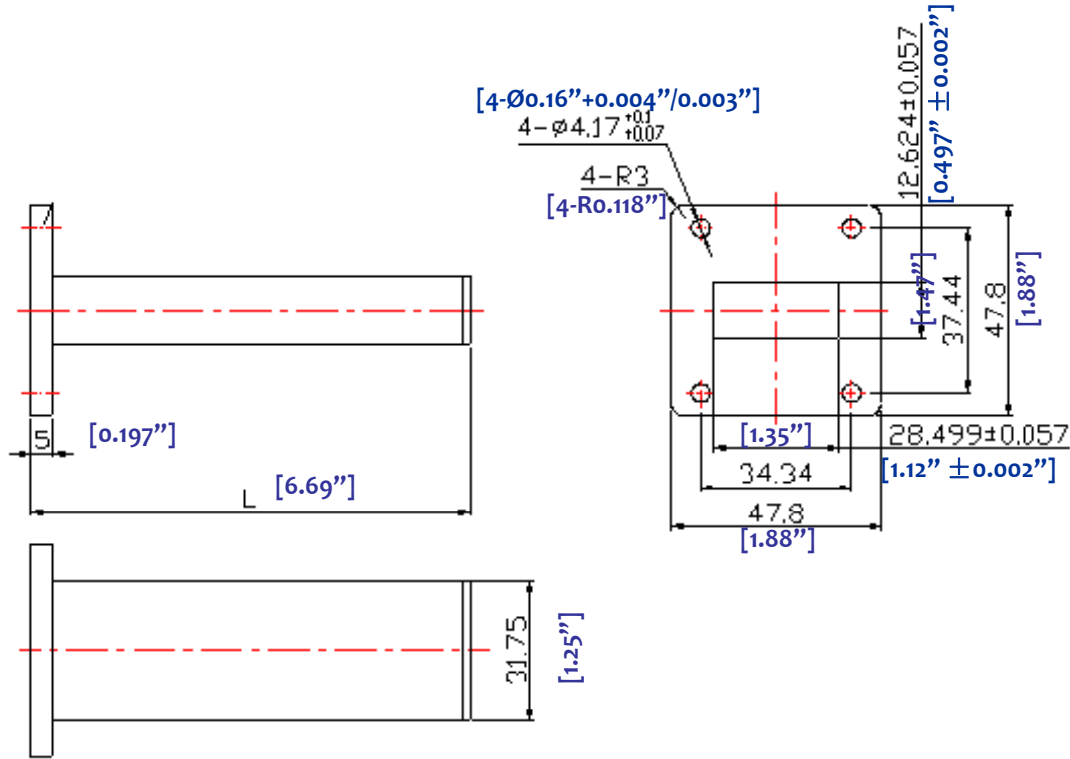

3.0	Electrical Specifications	
3.1	Frequency Range	6.6-9.99GHz
3.2	Average Power	50W (CW)
3.3	VSWR	1.20:1 (max)

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR112
1.2	Flange type	CPRF, COVER
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1		DATE	Jun 18 th 2009
 RFWT112A WAVEGUIDE TERMINATION		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	11
		ASSEMBLY REVISION	V55DS
www.rflambda.com		ASSEMBLY NAME	RFLVR05
RF-LAMBDA		DRAWING NUMBER	D05-1
SIZE	LT	SHEETS	1 OF 1