



Model: SW-6010-2S

Description:..... SP2T, Absorptive, PIN-Switch
Operating Frequency:..... 30 – 6000 MHz
Insertion Loss: 2.3 dB Max
Isolation:

30 – 1000 MHz	1000 - 6000 MHz
80 dB Min	70 dB Min

VSWR (RF Path “ON” or “OFF”): 1.5:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 250 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 350 ns Max
Phase Error (Port-to-Port): ±4° max
Operating Power:..... CW&AVG..... +27dBm (+30dbm @ COM Port)
..... Peak: 5W @ 5µS PW Max
Control Input Characteristics: TTL /Unit-Load, Floating-High
Control Logic:..... 2-Controls, Logic “0” = RF Path “ON”
Power Supplies:..... +5(±0.25)V @ 75mA Max
..... -12(±0.5)V @ 60mA Max
Connectors (RF): SMA (f), Removable
Connectors (Supplies/Controls) Solder Pins
Impedance: 50 Ohms Nominal
Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V]
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 & J2 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]

■ **Control Connectors**

- C1 [SMC(Jack), 50 Ω]
- C2 [SMB(Jack), 50 Ω]

■ **Control Impedance**

- D1 [50 Ω, Internally Terminated]


■ **Control Function**

- F1 [Inverse Logic, (“1” = Path “ON”)]
- F2 [Single Toggle Control (“1” for J1 path “ON”)]



Model: SW-6010-2S

Outline

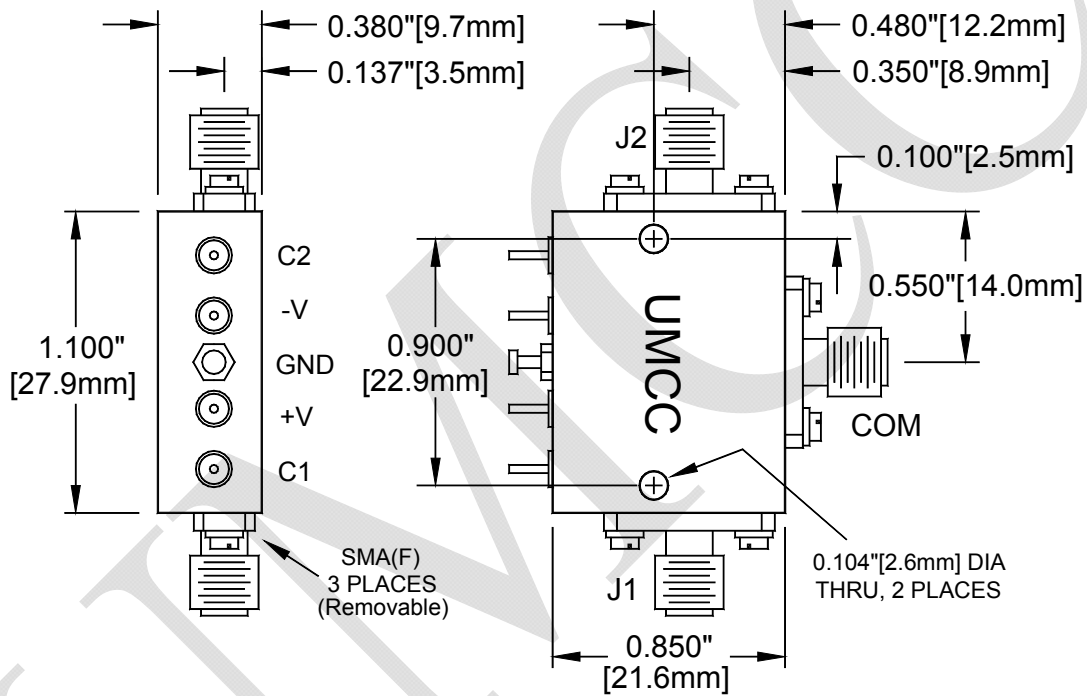

Weight	Tolerances
0.7 oz [19.8 g]	±0.015" [±0.38mm]