



0.8-2.5GHz 300W High Power 2-Way Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *

Low Insertion loss and high isolation

Standard: MIL E-5400, MIL E -16400


High power handling capability

* 300W average input when work as combiner.



Electrical Specifications				
Frequency Range (MHz)	Insertion Loss (dB. max)	Isolation (dB. min)	VSWR	Working Temp. Range (° C)
800~2500	0.2	6 (as combiner)	1.25:1	-20~+70
Average Power	Peak Power (KW)	Connector	Storage Temp. Range (° C)	Dimension unit
300(CW)	3	N-F	-40~+70	mm [inch]


Insertion loss

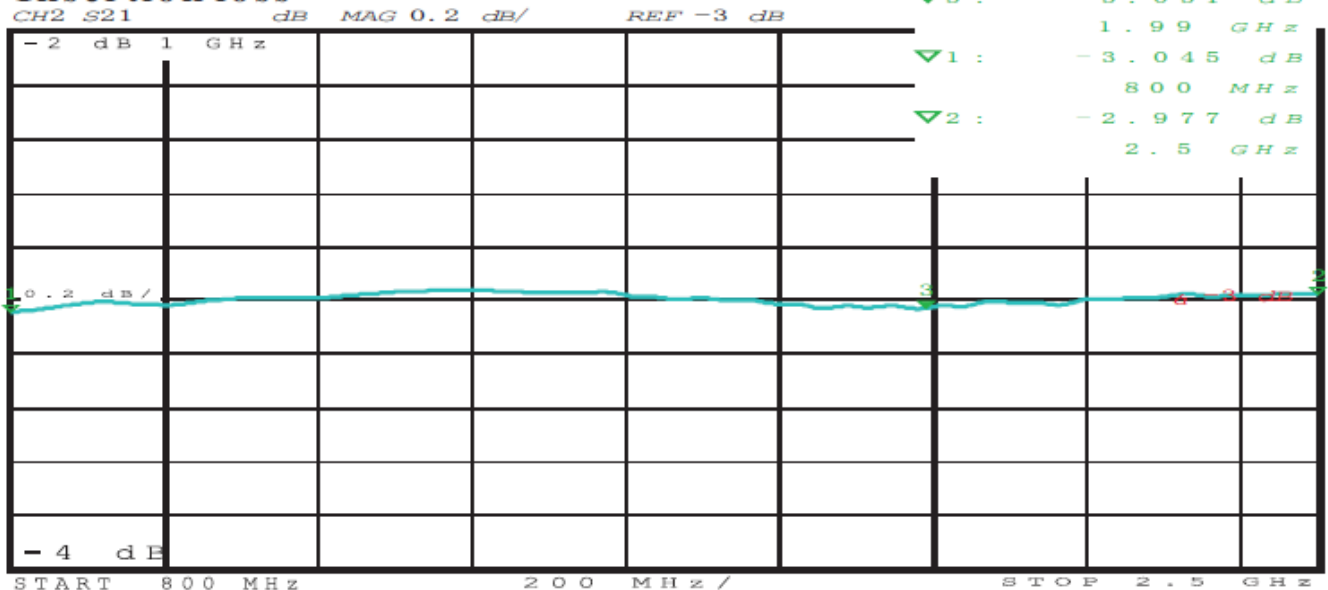

0.8-2.5GHz 300W High Power 2-Way Power Divider



VSWR(in)

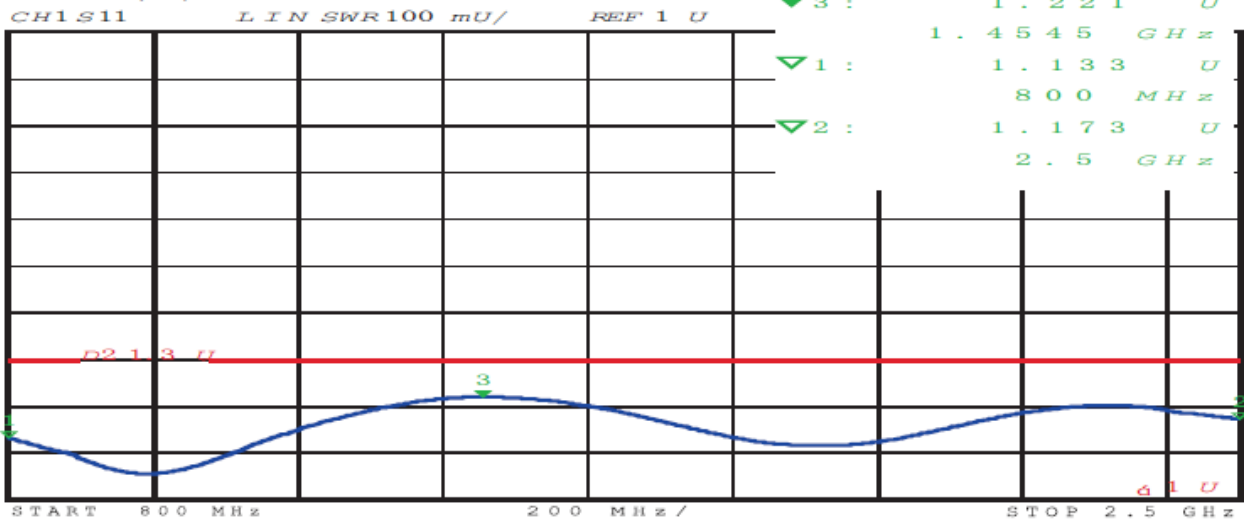

0.8-2.5GHz 300W High Power 2-Way Power Divider