


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	5-2-95
A	REV PER ECN 5515 & 6966	T.R.

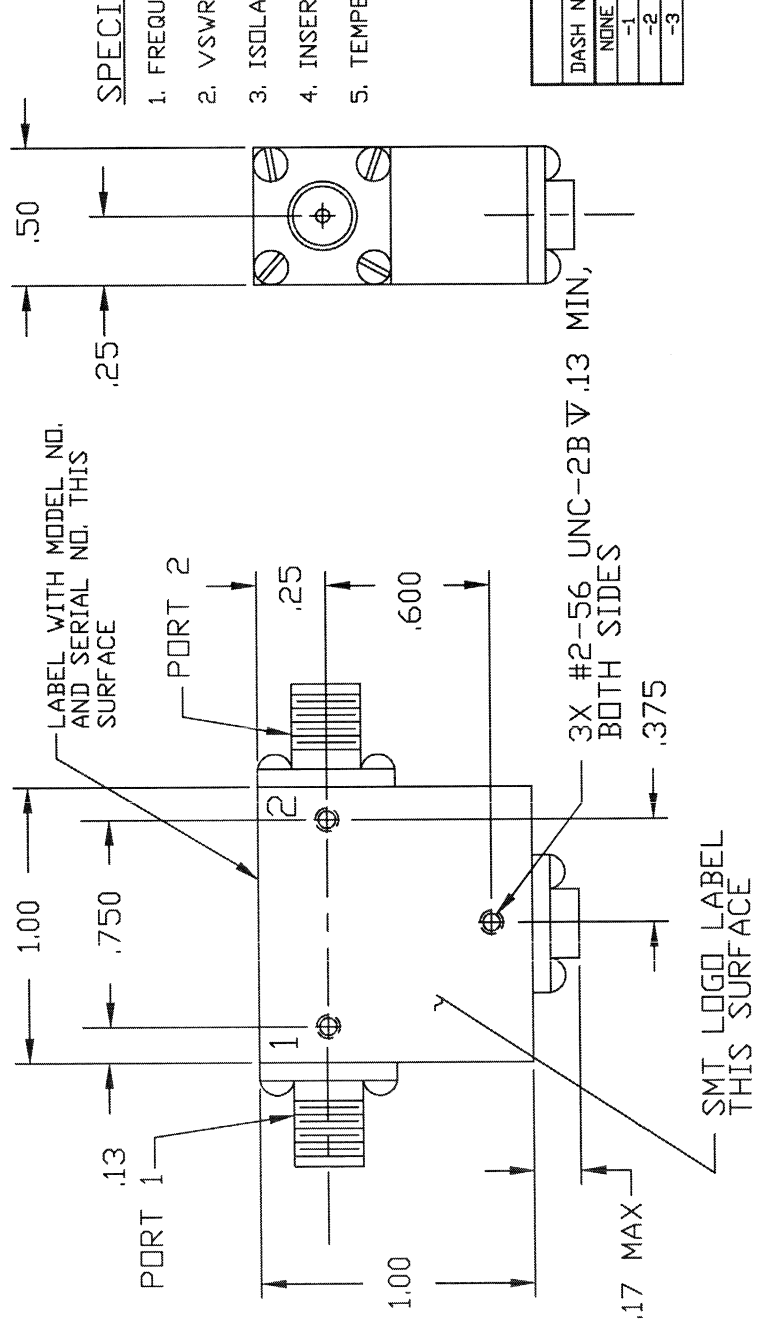

SPECIFICATIONS

- FREQUENCY RANGE 2.3 TO 2.7 GHz
- VSWR 1:25:1 MAX
- ISOLATION 20 dB MIN
- INSERTION LOSS 0.4 dB MAX
- TEMPERATURE
 - OPERATING -54° TO +85° C
 - STORAGE -54° TO +100° C

CONNECTOR ORIENTATION		
DASH NO.	PORT 1	PORT 2
NONE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE
-3	SMA MALE	SMA MALE

ITEM	QTY	FSCM REQ'D NO.	PART OR IDENTIFICATION NO.	DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST					
CONTRACT NO. SMD SIERRA MICROWAVE TECHNOLOGY					
TITLE: OUTLINE FOR SMI2327-X					
APPROVALS		DATE		REV	
A WILSON		4-27-95		A	
RODRIGUEZ		5-2-95		A	
MAY & PROGRESS				A	
J.L.				A	
MATERIAL		SIZE		REV	
		B		A	
		FSCM NO.		DWG NO.	
		1CY63		205-1950-001	
		ERROR SCALE		SHEET	
				OF	

ITEM	QTY	FSCM REQ'D NO.	PART OR IDENTIFICATION NO.	DESCRIPTION	MATERIAL SPECIFICATION
APPLICATION					
DO NOT SCALE DRAWING					
MATERIAL					
204-0416-001 SMI2327-3					
204-0415-001 SMI2327-1 & 2					
204-0269-001 SMI2327					
LIST OF MAT'L USED ON					