

Passband 1: DC to 3000 MHz

Diplexer (LP/HP)

Passband 1 Isolation: 60 dB

Passband 2: 4500 to 14000 MHz


WDK6+5-DC-3000/4500-14000-60

Passband 2 Isolation: 60 dB


Specifications

	Band 1 (Lowpass)	Band 2 (Highpass)
Passbands:	DC to 3000 MHz	4500 to 14000 MHz
Passband Insertion Loss:	0.5 dB max.	0.6 dB max.
Passband Return Loss:	14 dB min.	14 dB min.
Stopbands:	4500-14000 MHz	DC-3000 MHz
Stopband Attenuation:	60 dB min.	60 dB min.
Operating Temperature:	15 °C to 45 °C	
Power Handling:	max. 1 W CW into a 2:1 VSWR (Please see our warranty in this regard)	
Dimensions (L x W x H):	45 x 27 x 13.2 mm (plus connectors)	
Approx. Weight:	0.07 kg	
Mounting Provision:	4 x M2.5 threaded holes in base	
Connector Common:	- Please choose -	
Connector Band 1:	- Please choose -	
Connector Band 2:	- Please choose -	

Typical Performance

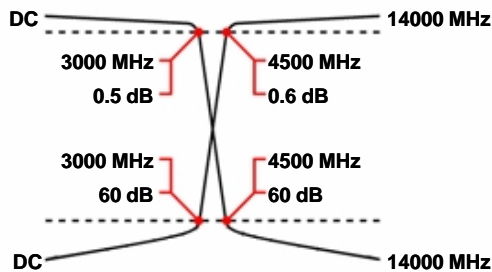

6+5 Section LC Design

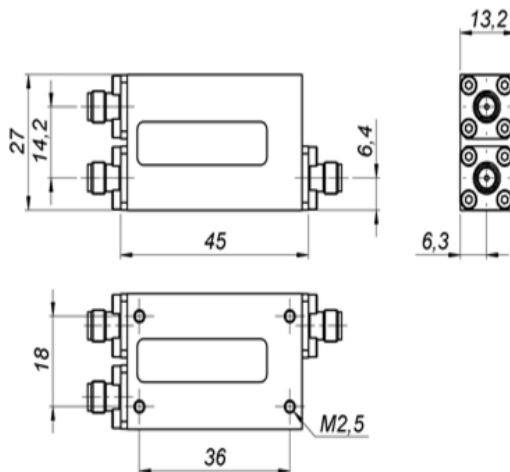

©2015 Wainwright Instruments. All rights reserved.

Euro Prices

(USD Prices will be quoted for US-based customers only)

1 - 4 pcs:	€ 1430
5 - 9 pcs:	€ 1287
10 - 24 pcs:	€ 1158

Delivery Terms

FCA Andechs (free carrier) according to **Incoterms 2010**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).
 Regarding payment terms and warranty see [Terms and Conditions](#).
Delivery time: normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



Wainwright Instruments GmbH
 www.wainwright-filters.com

Tel: +49 8152 918230
 Fax: +49 8152 918255
 info@wainwright-filters.com