

7LB50-155/X38-N/N - High Power Bandpass

◆ Features:

- Type N Connectors
- Power: 40 Watts
- Low Loss
- Flat Delay




◆ Specifications:


Insertion Loss:	<1.0 dB
VSWR:	1.5:1 across Passband
Stopbands:	15 dB min.
@124 & 186 MHz	>25 dB
@112 & 198 MHz	>35 dB
Environmental Specs:	
Shock	20 G's, 1/2 Sine, 11ms
Vibration	10 G's, 10 Hz - 2000 Hz
Temperature	-55 to +85° C
Relative Humidity	0-95%
Dimensions:	4.5" X 1.25" X 1.0"

◆ Applications:

- Aeronautical Navigation
- Fixed Mobile

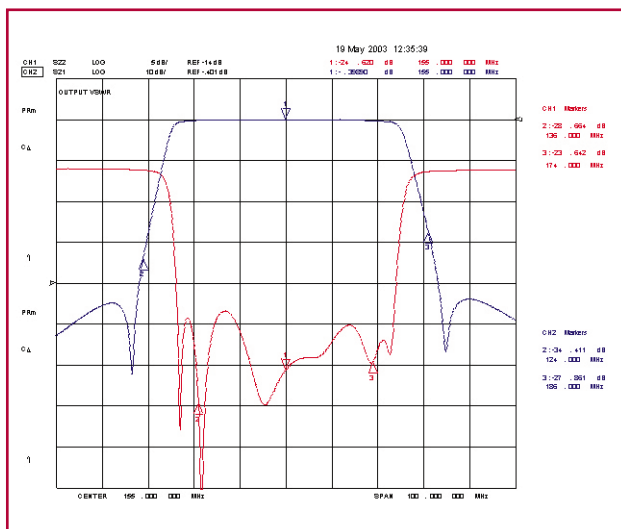

Amplitude/VSWR Response

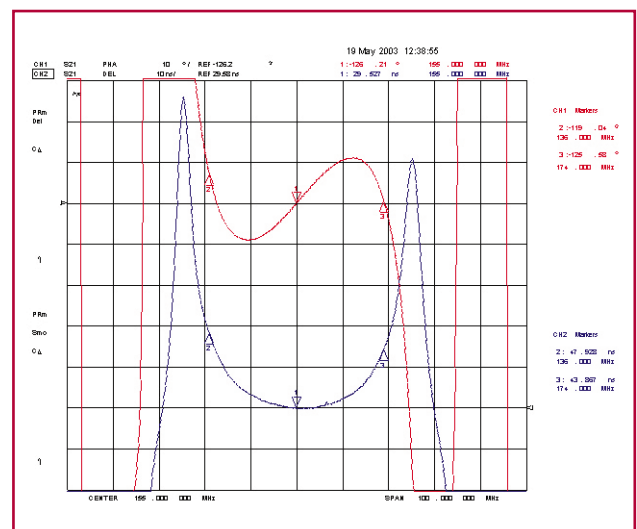

Phase/Group Delay

Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

