



WWW.BARRYIND.COM

# H04Z-2000J2T-00C36-X



## Aluminum Nitride


## LEADED ATTENUATOR

### Feature:

- ◆ AIN material
- ◆ 10 Watt power handling
- ◆ DC - 3 GHz


### General Description:

The H04Z-2000J2T-00C36-X is a leaded attenuator with a power rating of 10 Watts max while maintaining a base plate temperature of 100°C. It offers a frequency range from DC- 3 GHz.

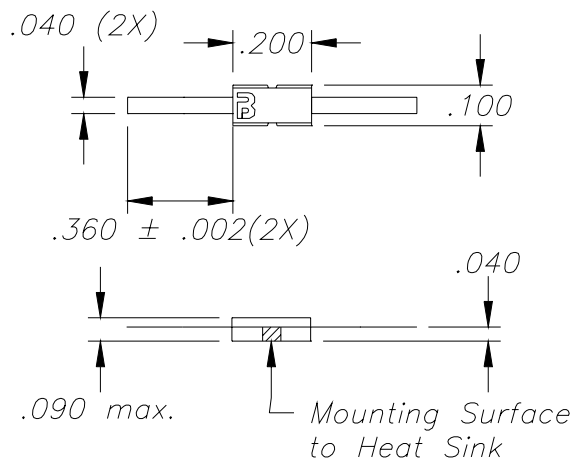


Dimensions in inches  
Tolerance  $\pm .010$  unless  
otherwise stated

Unit can be mounted in  
either direction

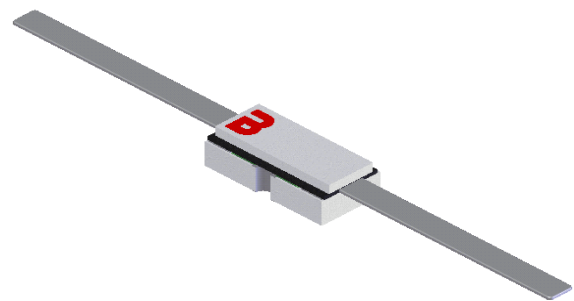

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		3	GHz
Input Return Loss	17			dB
Output Return Loss	17			dB
Attenuation	19	20	21	dB
Power Dissipation			10	Watts
Mounting Surface Temperature			100	°C

\* Barry Industries reserves the right to change part number and or process without notification

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry is ISO 9001:2000 Certified by



Origination Date	Revision Date	Rev.
11/7/05	9/18/07	A