






Standards
NF C 96-315
MIL-DTL-39030

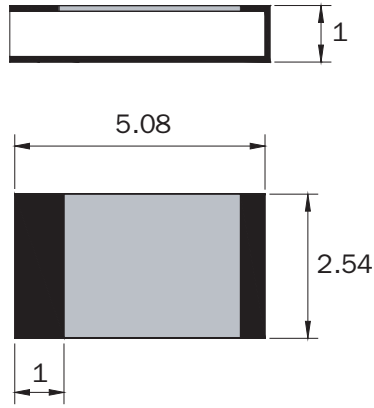

Substrate	BeO
Resistive film	Thick film
Protection film	Epoxy
Contacts	PtAg

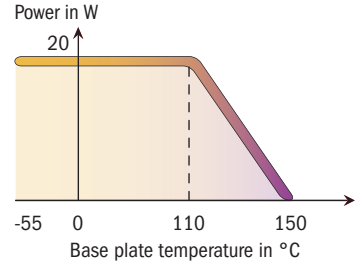

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
40-0271	2	20	50	1.20

mm	inch
1	0.039
2.54	0.100
5.08	0.200

Available on Tap and Reel Packaging

