

# Voltage Controlled Oscillator

# RSO1725AM

Ultra Low Noise 1650 to 1800 MHz

Rev. A

## Features

- Ultra low noise
- Linear tuning characteristics
- Low pushing / Low pulling

## Applications


- SATCOM
- Receiver
- Test Equipment
- Radar
- Point-to-Point
- Radio
- MMDS
- WiMax

## Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1650		1800
Output Power	dBm		7.0	
Output Impedance	$\Omega$		50	
Phase Noise	@10kHz offset		-106	
	@100kHz offset		-126	
Tuning Voltage (Vt)	Vdc	+0.5		+4.5
Tuning Voltage Sensitivity (Kv)	MHz/V		50	
2nd Harmonic Suppression	dBc		-25	
Power Supply (Vcc)	Voltage		5	
	Current		25	
Pushing Figure	MHz/V		0.5	
Pulling Figure	MHz		2.0	
Input Capacitance	pF		57	
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

## Dimensions

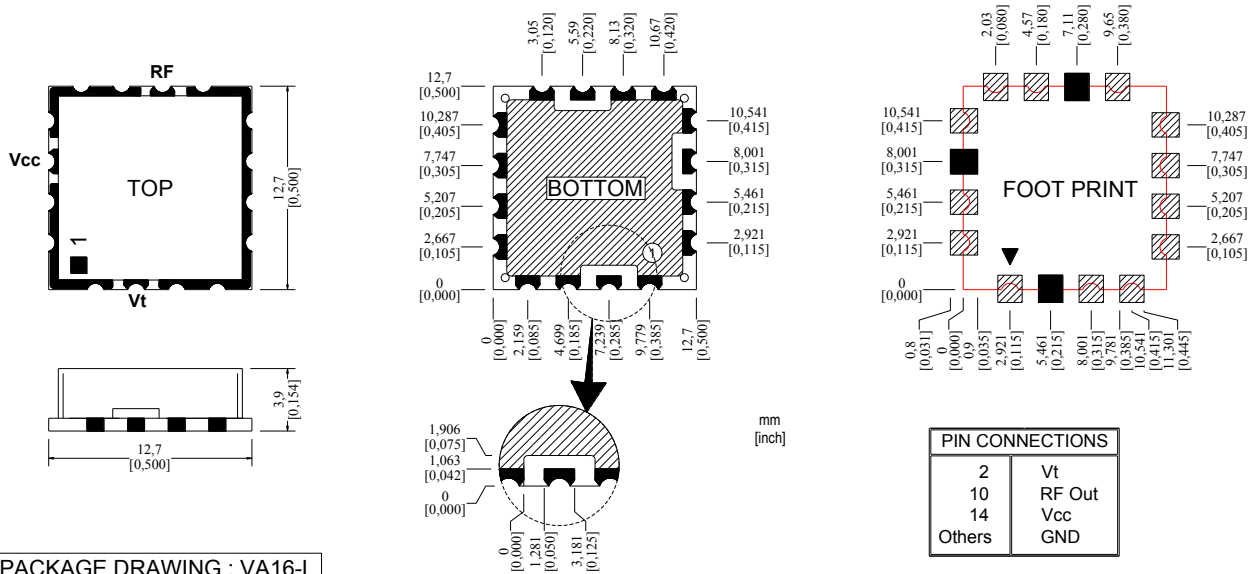

PACKAGE DRAWING : VA16-L