

8MP20-7140/H500-PX/PX — Mini-Pack®

◆ Features:

- Gull Wing Surface Mount RF Pins
- Meets Military Environmental Requirements
- 45% Weight Reduction from Standard Combine Design
- 40% Volume Reduction from Standard Combine Design




◆ Specifications:


Center Frequency:	7140 MHz
Insertion Loss at Center Frequency :	1.5 dB maximum
.5 dB Bandwidth:	500 MHz minimum
Attenuation:	
40 dB minimum:	6600 & 7640 MHz

◆ Applications:

- Designed for Space Flight Application
- Used in Airborne, Shipborne or Vehicle Mount

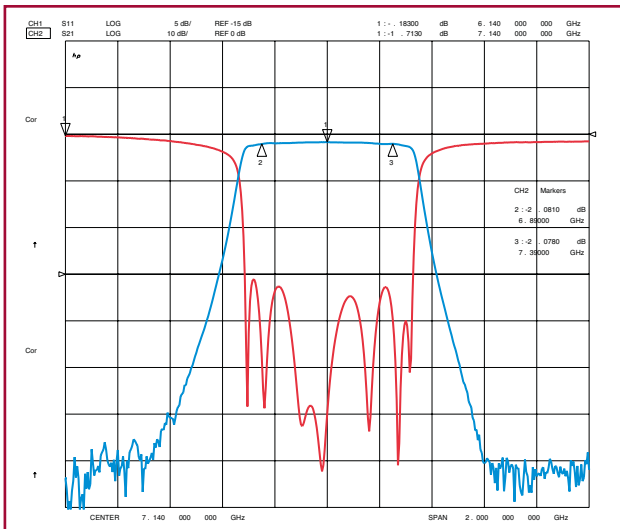

Insertion Loss Characteristics

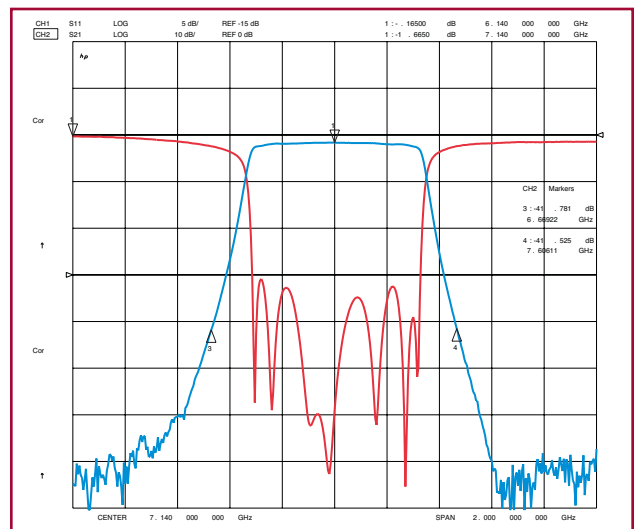

40 dB Rejection Points

www.klmicrowave.com
 Phone: 410-749-2424 • FAX: 443-260-2268
 Email: sales@klmicrowave.com



www.klfilterwizard.com
 2250 Northwood Drive
 Salisbury, MD 21804