


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

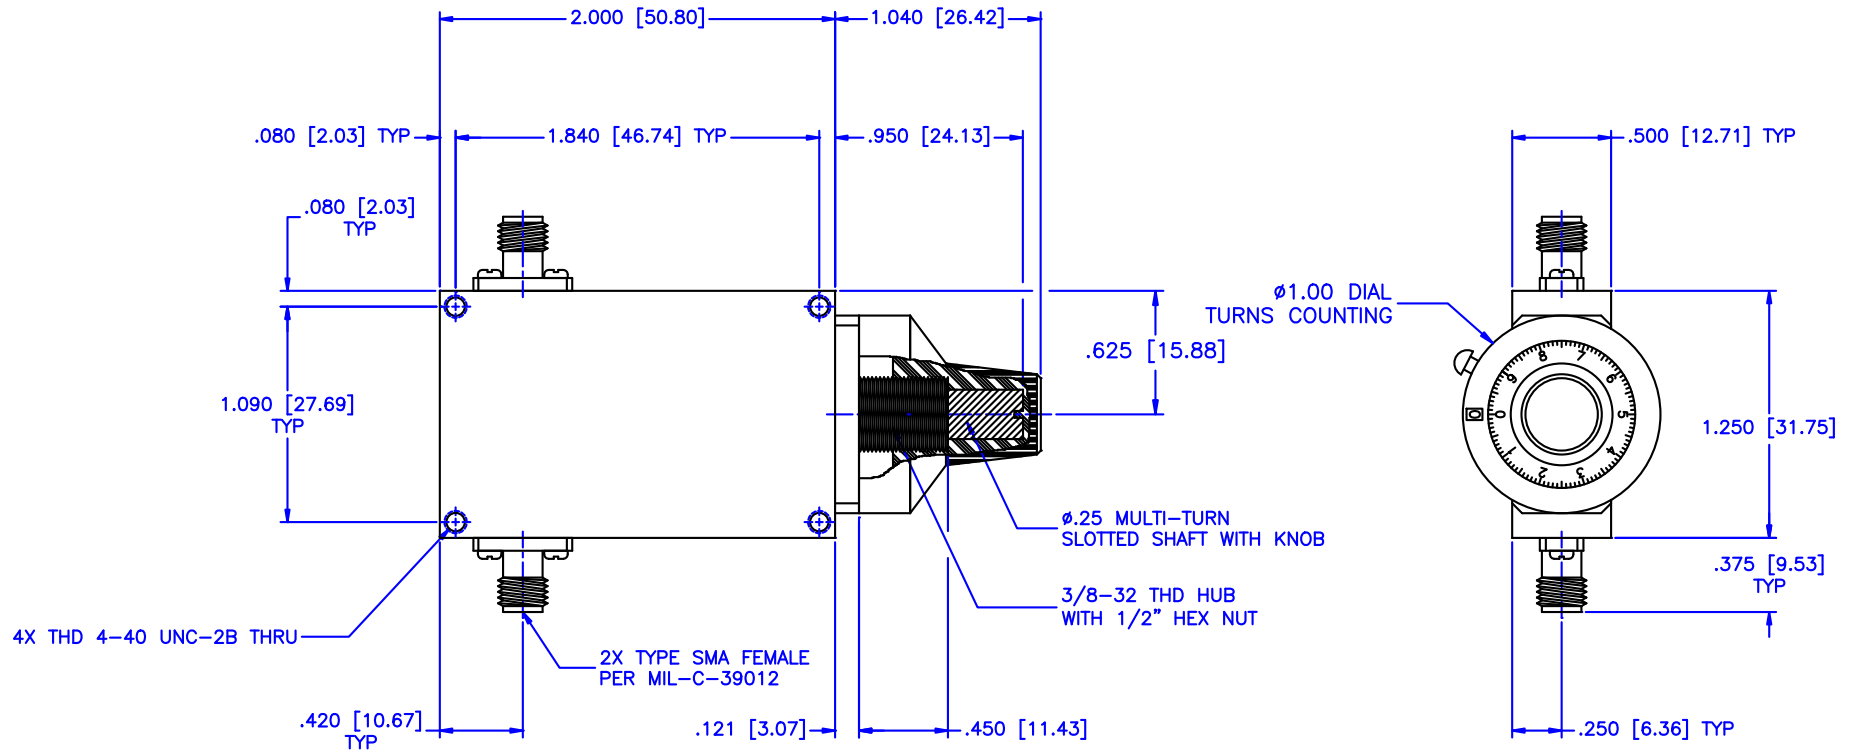

Specifications

Frequency Range: 3.6–4.3 GHz
 Attenuation: 20dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1
 Attenuation Vs Frequency: ±.50dB
 RF Power: 5W Average, 3kW Peak

Environmental

Operating Temperature: -55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 25,000ft Operating
 40,000 ft. Survival

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL	
DRAWN: Paiboon Luekhamhan		DATE: 02-10-2011	PART NO. CA2-20/D	
APPROVED: T. Nguyen		DATE: 02-10-2011	CAGE CODE: OD2L5	SIZE: A
THIRD ANGLE PROJECTION		REV: N/A		DWG NO. 85474
		DO NOT SCALE THE DRAWING		