

KR 2510-SMA Bandpass Filter

General Description


KR 2510-SMA is a 40 MHz surface mount bandpass filter. Other center frequencies and bandwidths available. Please consult the factory.

Features

- SMA Connectors
- Sharp Transition to Stopband
- >55 dB Stopband
- 50 Ω Source and Load

Typical Performance

Overall Response (10 dB/div)

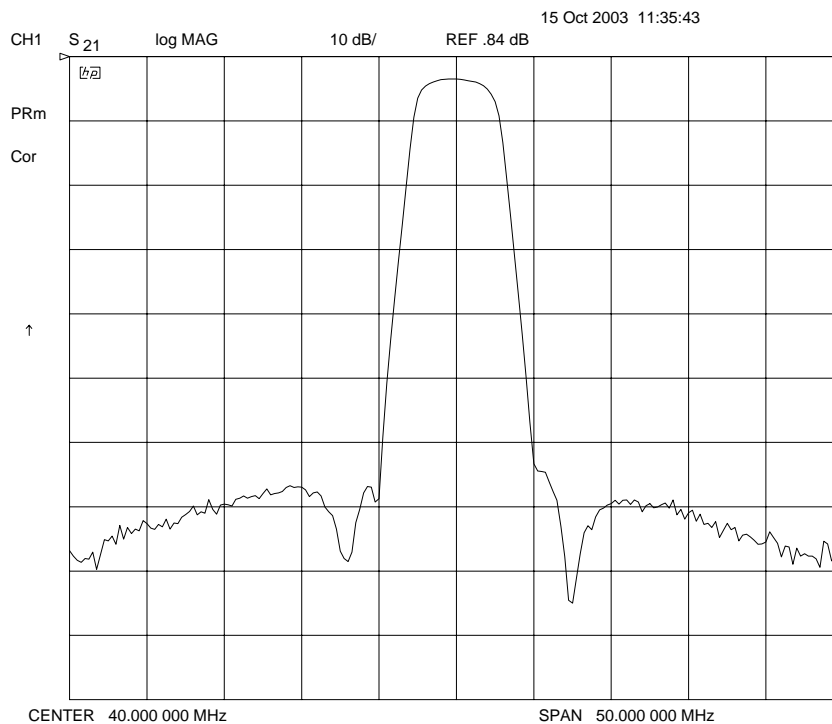


KR 2510-SMA Bandpass

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	40 MHz
Insertion Loss	< 5 dB (2.5 dB typical)
Min 3 dB Bandwidth	4 MHz (4.8 MHz typical)
Max 55 dB Bandwidth	10 MHz (9.5 MHz typical)
Source and Load	50 Ω

Physical Dimensions

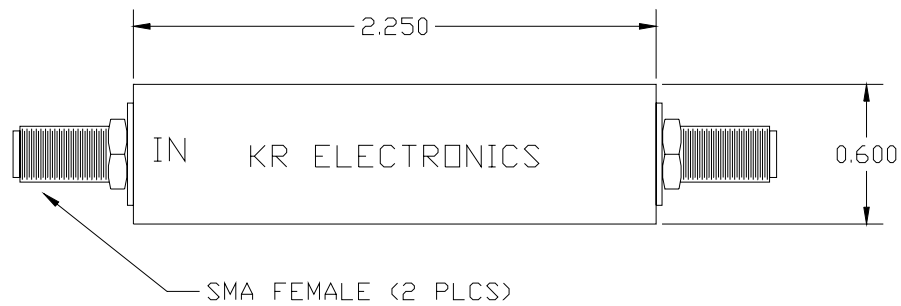

Dimensions in inches
Metal Case