


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	

A REV PER ECN: 5515

SPECIFICATIONS

- FREQUENCY RANGE.....2.0 TO 2.6 GHz
- VSWR.....1.35:1 MAX
- ISOLATION.....17 dB MIN
- INSERTION LOSS.....0.5 dB MAX
- TEMPERATURE:
OPERATING.....-20° TO +65°C
STORAGE.....-55° TO +100°C

OPTION NO.	HEIGHT (NOM.)
A	.065
B	.075
C	.090
D	.100
E	.120

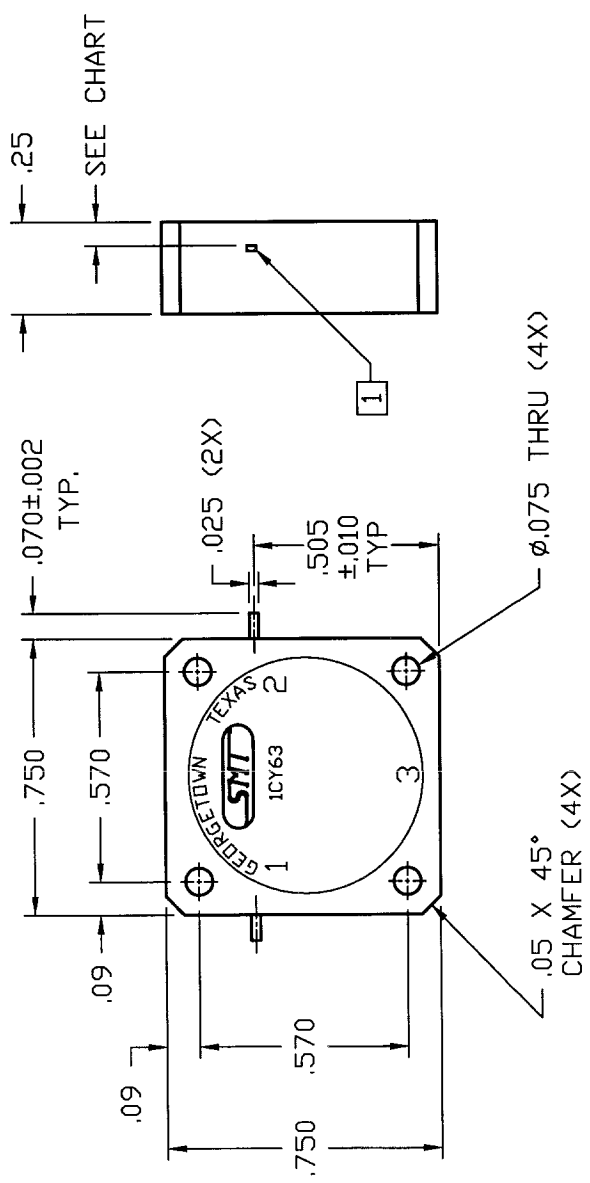

QTY	FSCM RECD NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES .XXX±.001 ± .XXX±.005 ±		APPROVALS	DATE	
MATERIAL		DRAWN		
FINISH		CHECKED		
NEXT ASSY		ISSUED		
203-0130-001	SDI2026A			
	USED ON			
	APPLICATION			
	SCALE			
	SHEET			

SIERRA MICROWAVE TECHNOLOGY	
OUTLINE FOR SDI2026-X	
SIZE	FSCM NO.
B	1CY63
DWG. NO.	REV.
205-2195-001	

NOTES:

- TABS ARE .005±.001 THK BeCu, SN63 SOLDER TINNED OR GOLD PLATED.
- CASE: STAINLESS STEEL, NICKEL PLATED.