


100 Watt Linear X-Band Outdoor High Power SSPA Block Upconverter

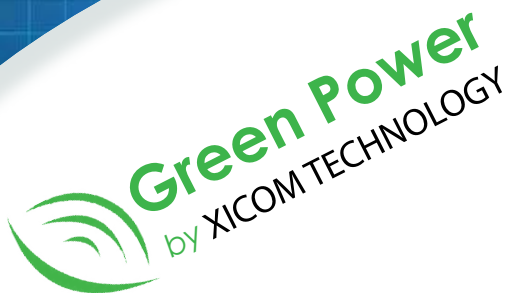

FEATURES

- *100W WGS linear output power*
- *High efficiency GaN design*
- *Compact, rugged 32 lb. package for mobile applications*
- *Operates over -40°C to +60°C environment*

The **XTSLIN-100X-B1** High Power Solid State Block Upconverters (BUC) are a series of compact fully integrated antenna mount units designed for low cost operation and longevity. This unit generates over 100W of linear power, as defined by MIL-STD-188-164, providing the most linear output power available in a package this size. By using the latest in high efficiency GaN technology this linear power can be achieved with a prime power consumption of only 925 VA.

Intended for outdoor operation in challenging environments, the **XTSLIN-100X-B1** weighs only 32 lbs. Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status via Ethernet or RS-485 and RS-232.




PERFORMANCE SPECIFICATION

Parameters


XTSLIN-100X-B1

FREQUENCY RANGE		
Output	7.9 to 8.4 GHz	
Input	950 to 1450 MHz	
LO Frequency	6950 MHz	
Input Level, w/o damage (maximum)	10 dBm	
Reference Signal Frequency	external 10 MHz	
10 MHz Power Level	0 dBm \pm 5 dB	
IF/Reference Input Impedance	50 Ohms	
OUTPUT POWER		
Linear Power (minimum)	50 dBm	
GAIN		
Factory configurable small-signal gain	60 dB to > 68 dB	
Field-user adjustable attenuation range	15 dB min, 0.1 dB steps	
Maximum SSG Variation Over		
Any Narrow Band	\pm 0.5 dB per 40 MHz	
Full Band	\pm 1.50 dB	
Slope (maximum)	\pm 0.04 dB/MHz	
Stability, 24 hr. (maximum)	\pm 0.25 dB	
Stability, Temperature (maximum)	\pm 2.0 dB over temperature range at any frequency	
INTERMODULATION (maximum) with two equal carriers @ Linear Power	-25 dBc	
SPECTRAL REGROWTH @ Linear Power	-30 dBc, 1 SR, OQPSK	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM CONVERSION (maximum)	2.0 deg/dB at Linear Power	
NOISE POWER (maximum)		
Transmit Band	-75 dBW/4 kHz	
Receive Band	-75 dBW/4 kHz	
GROUP DELAY (maximum)		
Bandwidth	Any 40 MHz	
Linear	\pm 0.01 nS/MHz	
Parabolic	\pm 0.005 nS/MHz ²	
Ripple	0.5 nS/Pk-Pk	
IN-BAND DISCRETE SPURIOUS		
AC Power Line	Sum of fundamental and harmonic < -30 dBc	
Single Sideband	Sum of all other spurs < -36 dBc	
OUTPUT SPURIOUS @ P _{LIN}	-60 dBc	
PHASE NOISE (maximum)		
	10 Hz	-33 dBc/Hz
	100 Hz	-63 dBc/Hz
	1 kHz	-73 dBc/Hz
	10 kHz	-83 dBc/Hz
	100 kHz	-93 dBc/Hz
	1 MHz	-103 dBc/Hz
	10 MHz	-113 dBc/Hz
	100 MHz	-113 dBc/Hz
10 MHz REFERENCE PHASE NOISE (maximum)	10 kHz	-160 dBc/Hz
VSWR		
Input (maximum)	1.65:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

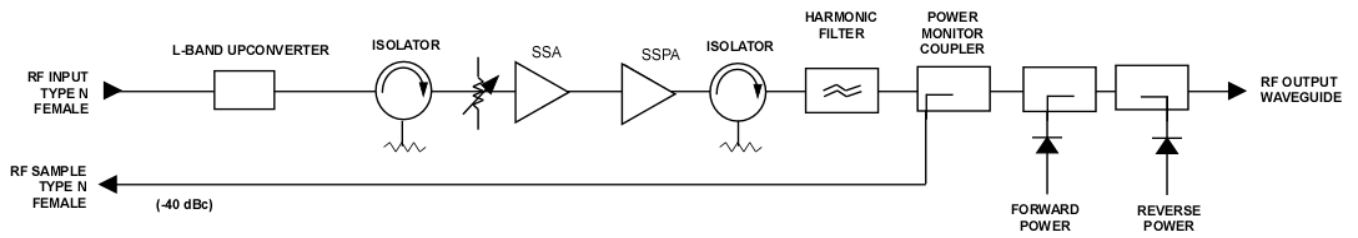

OUTLINE DRAWING

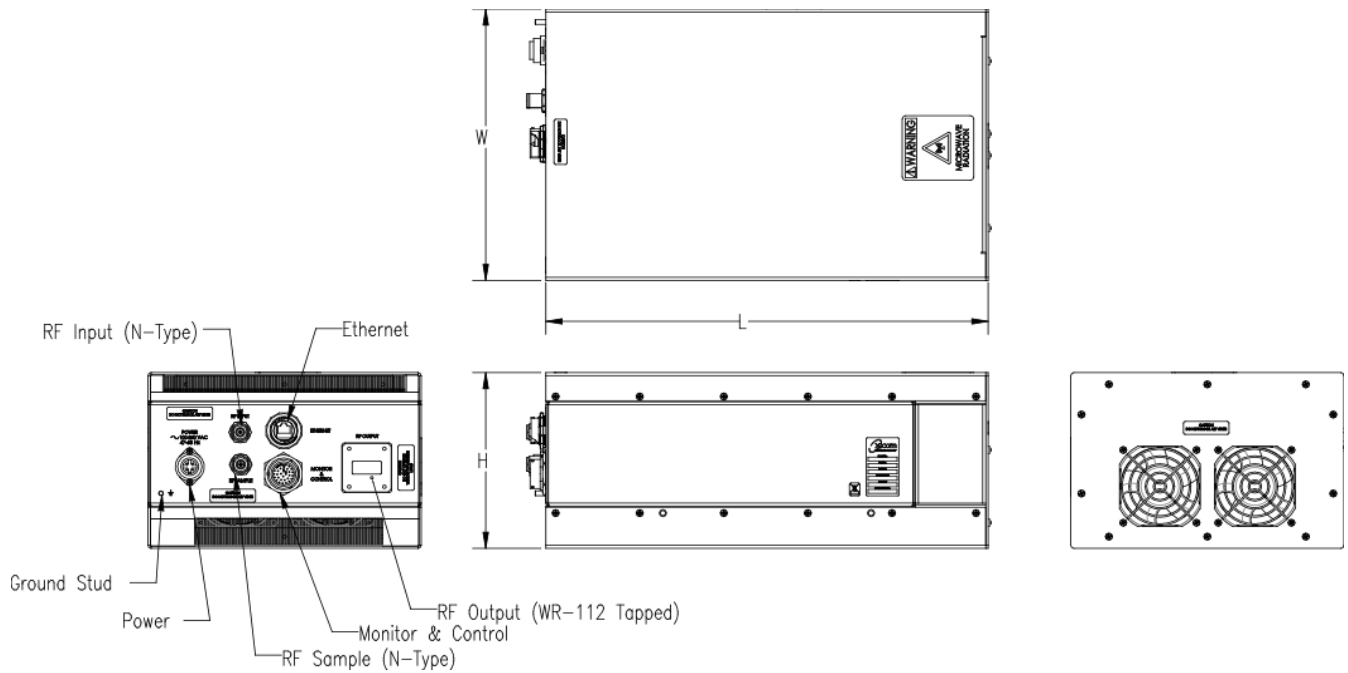

DIMENSIONS		
	Inches	Centimeters
H	6.8	17.3
W	10.5	26.7
L	17.0	43.2
WEIGHT = 32 lbs (14.5 kg)		

PRIME POWER

90 to 264 VAC
47 to 63 Hz, Single Phase
725 VA Typical @ P_{LIN}

ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	12,000 Feet MSL Max.
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
REMOTE CONTROL	Transmit ON/OFF	RF Inhibit
	RF Attenuation	Fault Reset
	Summary Fault	
REMOTE STATUS	Transmit ON	Temperature
	RF Output Power	Fault Identification
	Reflected Power	
Form C Dry Contact Closure	Summary Fault	
COMPUTER	Hardware Interface:	2 Ports: RS-232 & RS-422/485 Ethernet
	Xicom Command Set	ASCII Commands
SERIAL PORT		
RF MONITOR PORT	-40 dB Coupling Value (Nominal)	

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com