



**Model: SR-V000-4S**

Description:..... SP4T, Reflective, PIN-Switch

Operating Frequency:..... 0.1 – 18 GHz

Insertion Loss:

|              |             |
|--------------|-------------|
| 0.1 – 10 GHz | 10 – 18 GHz |
| 2.3 dB Max   | 3.3 dB Max  |

Isolation:

|              |             |
|--------------|-------------|
| 0.1 – 10 GHz | 10 – 18 GHz |
| 80 dB Min    | 70 dB Min   |

VSWR (“ON” paths):..... 1.9:1 Max  
 Rise/Fall time (10% to 90% RF, 90% to 10% RF):..... 25 ns Max  
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 120 ns Max  
 Operating Power:..... CW&AVG..... +30dBm Max  
 ..... Peak:..... 10W @ 1µS PW Max  
 Control Input Characteristics:..... TTL / Unit-Load / Floating-High  
 Control Logic:..... 4-Controls, Logic “0” = RF Path “ON”  
 Power Supplies:..... +5(±0.25)V @ 140mA Max  
 ..... -12(±0.5)V @ 70mA Max  
 Connectors (RF):..... SMA (f), Removable  
 Connectors (Supplies/Controls)..... Solder Pins  
 Impedance:..... 50 Ohms Nominal  
 Quality:..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
 Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)  
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 – J4 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ COM Port with SMA(M) ]


■ **Control Function**

- F1 [ Inverse Logic, (“1” = Path “ON”) ]
- F2 [ 2-BCD Control + Enable ]



Model: SR-V000-4S

**Outline**

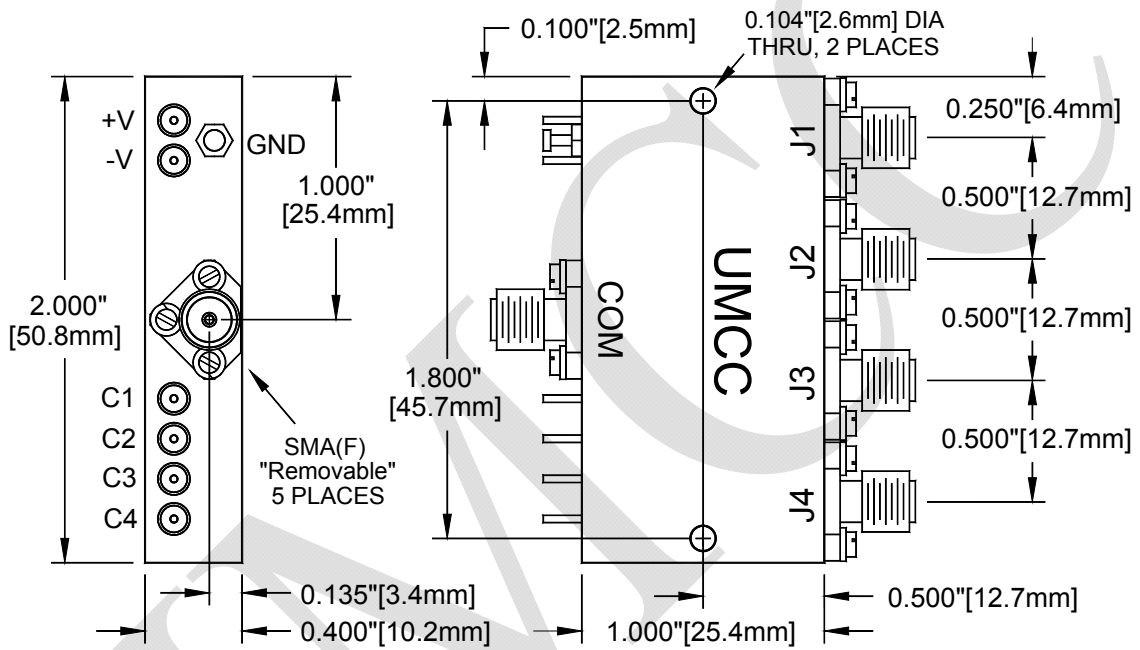

| Weight         | Tolerances        |
|----------------|-------------------|
| 1.3 oz [36.9g] | ±0.015" [±0.38mm] |