


Key Features:

- Frequency range: 2.8~4.0GHz
- Drop-in configuration
- Small size, low cost
- Power handling up to +200 Watts CW, 2000 Watts pulse
- Operating temperature -30~+60°C
- Customer specify center frequency, bandwidth and circulation direction

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSW R	Forward Power, Watts, CW/Pulse	Temp. Range, °C
F1616-0310-13	2.9~3.3	0.4	≥ 20	≤ 1.2	200/2000	-30 ~ +60
F1616-0335-15	3.1~3.6	0.5	≥ 20	≤ 1.2	200/2000	-30 ~ +60
F1616-0355-08	3.4~3.7	0.4	≥ 20	≤ 1.2	200/2000	-30 ~ +60

Mechanical Structure:

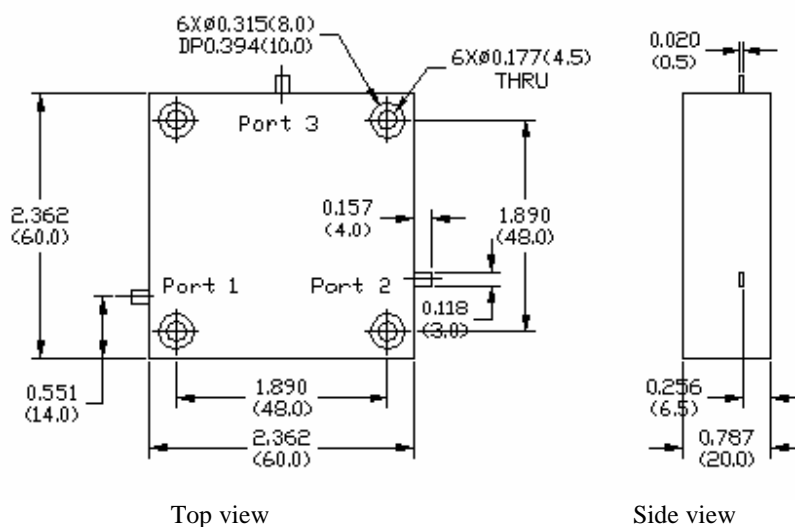

Note: All units in inches (mm).

Ordering Information:

