


- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500V RMS @ 60Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: TEFLON, ASTM-D-1710
- 2.2 CENTER CONTACT: BRASS, ASTM-B-16
- 2.3 LOCKING RING: BERYLLIUM COPPER, ASTM-B-196
- 2.4 ALL OTHER METAL PARTS: BRASS, ASTM-B-16
- 2.5 GASKET: SILICON RUBBER, ZZ-R-765, GR. 50, RED
- 2.6 SPRINGWASHERS: BERYLLIUM COPPER PER ASTM-B-196
- 3.0 FINISHES
- 3.1 CENTER CONTACT: GOLD PLATED
- 3.2 ALL OTHER METAL PARTS: NICKEL PLATED
- 4.0 MECHANICAL
- 4.1 INTERFACES PER MIL-STD-348

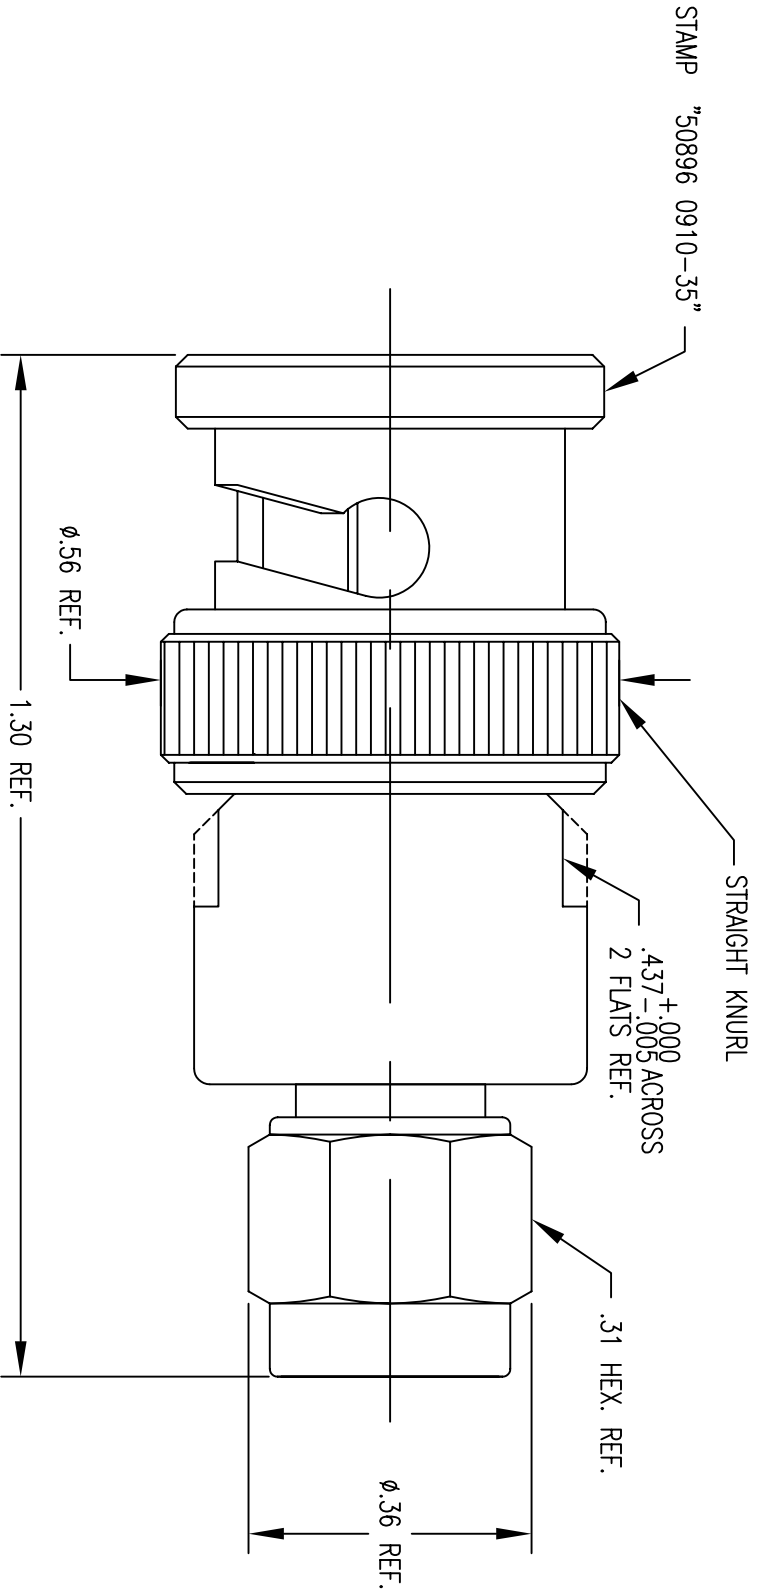

DWG NO.	01-0910-35-1	REV.	A
PLATING VARIATIONS			
PART NUMBER	BODY	CONTACT	
0910-35	NICKEL	GOLD	

SAN-TRON, INC.
 4 NEWBURYPORT TPK. IPSWICH MA USA 01938
 TEL: 978-356-1585 FAX: 978-356-1573
 WWW.SANTRON.COM E.MAIL: SANTRON@SANTRON.COM

ADAPTER, STARIGHT, BNC (M) - SMA (M)

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED. UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. .XXX = ±.005 ALL MACHINED SURFACES 63√ MAX. .XX = ±.01 ANG. ±1/2° FRACTIONAL = 1/164

① 004 MAX. TIR

REV.	Revisions	Ref.:	Disp.	Date	Dwn.	Appd.
A	ORIGINAL		NEW	8/18/03		

REMOVE ALL BURRS AND SHARP EDGES .005 MAX.

THIRD ANGLE PROJECTION	DWN	RD	CHKD	SJS	FSH
		8/19/03		8/19/03	8/20/03

SCALE: 4:1

SEE NOTE 2.0

SEE NOTE 3.0

DWG NO. 50896

OL-0910-35-1

REV. A

DO NOT SCALE DRAWING