

# KR Electronics

## General Description


KR 2750 is a 165 MHz group delay equalized lowpass filter. The filter has a minimum of 50 dB attenuation by 225 MHz. Other passband frequencies are available. Please consult the factory.

### Features


- Sharp Transition to Stopband
- Group Delay Equalized
- >50 dB Stopband
- 50  $\Omega$  Source and Load

## Typical Performance

**Passband Amplitude & Group Delay**  
(0.5 dB/div and 2 nsec/div)

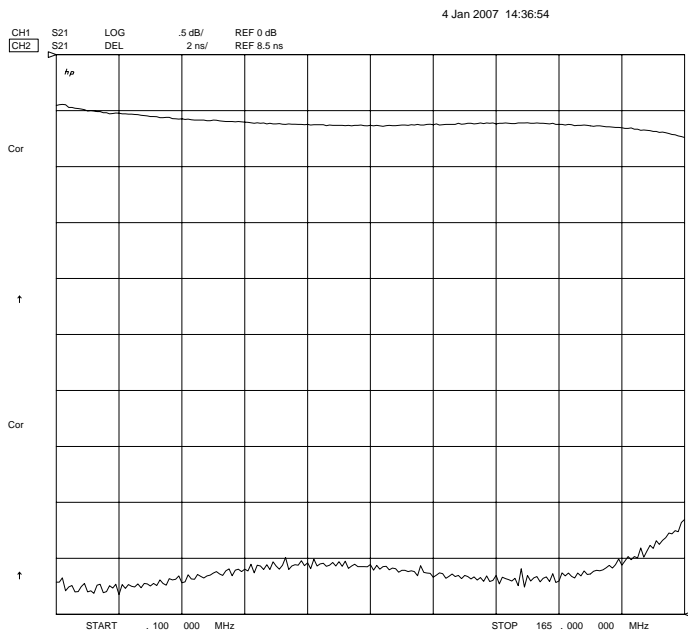

**Overall Response**  
(10 dB/div)

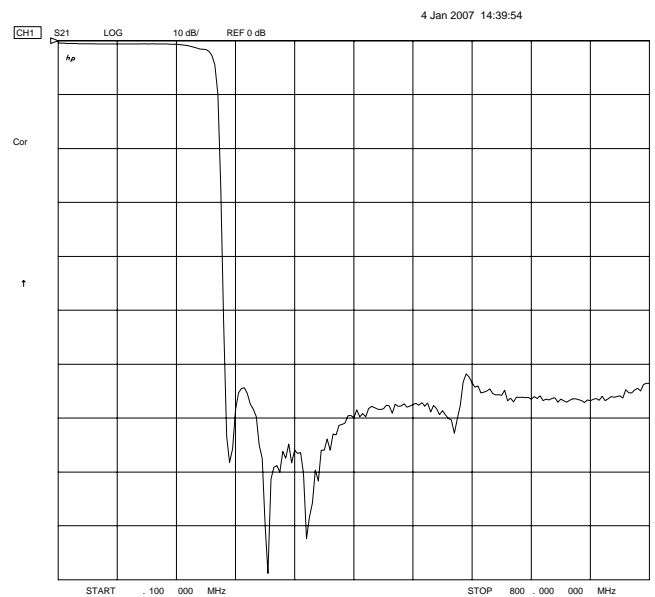

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2750

## Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB (0.5 dB typical)
End of Passband	165 MHz
Passband Ripple	< 0.75 dB
Group Delay Ripple	< 5 nsec
Attenuation 225 to 500 MHz	> 50 dB
Attenuation 500 to 800 MHz	> 40 dB
Source and Load	50 $\Omega$

## Physical Dimensions

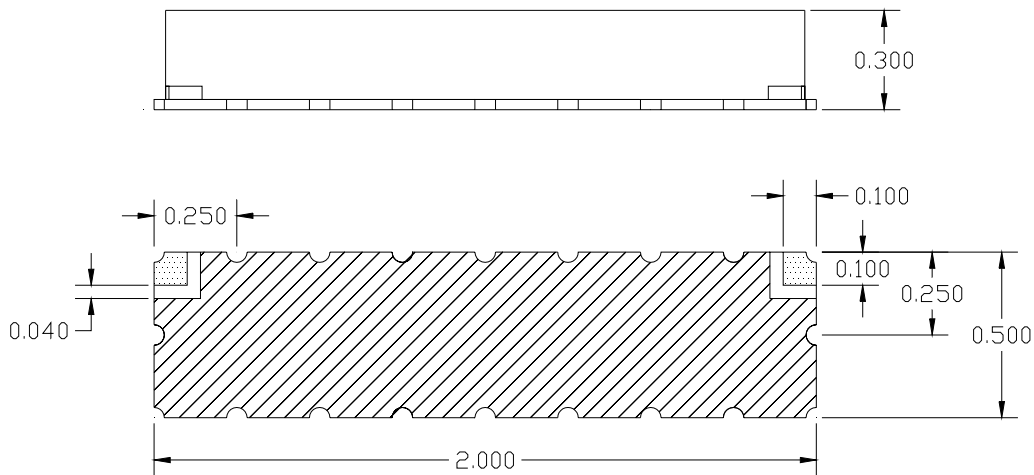

Notes:

1. Surface mount package — Metal cover open frame
2. Dimensions in inches
3. Maximum reflow temperature is 230° C for 10 sec maximum.
4. If boards are cleaned after installation, units must be completely dried.