

# TERMINATION TNC/MALE 6 GHZ 5 WATTS

ST6T-5W

## SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ  
VSWR: 1.25:1 MAX TO 6 GHZ  
POWER (AVG) 5 WATTS @ 25° C  
POWER DERATES LINEARLY TO 1 WATT @ 125° C  
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: ALBALOY PLATED BRASS  
MATERIAL CONTACT: Au PLATED BRASS

ENVIRONMENTAL:

TEMP: -55° C TO +125° C  
CORROSION(SALT SPRAY): MIL-STD-202 METHOD 101 METHOD B  
VIBRATION: MIL-STD-202 METHOD 204 CONDITION D  
SHOCK: MIL-STD-202 METHOD 213 CONDITION I  
THERMAL SHOCK: MIL-STD-202 METHOD 107 CONDITION B  
MOISTURE RESISTANCE: MIL-STD-202 METHOD 106

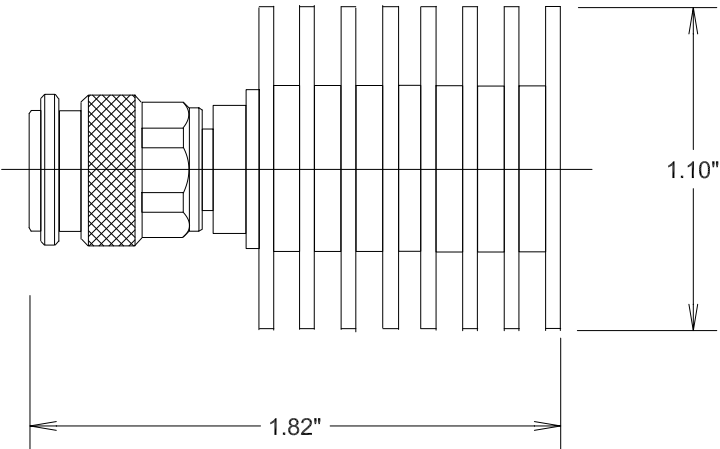

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 [WWW.FAIRVIEWMICROWAVE.COM](http://WWW.FAIRVIEWMICROWAVE.COM)

TITLE

**TERMINATION TNC/MALE 6 GHZ 5 WATTS**

SIZE

**A**

CAGE CODE

**3FKR5**

DWG NO

**ST6T-5W**

REV

--

SCALE

SHEET