


Features

- 0 dBm Output Level at 5800 MHz
- Channel Step Size : 500 kHz
- 1/2, 3'rd Harmonic : < -3 dBc
- Spurious Level : < -50 dBc
- Lock Time : < 20 ms
- Current Consumption: <60 mA

Description

The plerow™ PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz	5700		5900
Output Power	dBm	-3	0	3
Supply Voltage	V	4.75	5.0	5.25
Current Consumption	mA		50	60
Channel Step Size	kHz		500	
2 nd Harmonics	dBc		-15, -10	-8, -3
Spurious Level	dBc		-55	-50
Lock Time	ms		12	20
Reference Frequency	MHz		10	
Reference Input Level	dBm		0	
Phase Noise (C / N)				
@ 1 kHz	dBc/Hz		-73	-65
@ 10 kHz	dBc/Hz		-75	-68
@ 100 kHz	dBc/Hz		-95	-88
Output Impedance	Ω		50	
Operating Temp. Range	°C	-40	25	80
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

1) Measurement conditions are as follows: T = 25°C, V_{CC} = 5 V, Freq. = 5800 MHz, 50 ohm system.

More Information

Website: www.asb.co.kr
 E-mail: sales@asb.co.kr


Tel: (82) 42-528-7220
 Fax: (82) 42-528-7222

ASB, Inc., 4th Fl. Venture Town
 Bldg, KT HRDC, 367-17 Goi-
 jeong-Dong, Seo-Gu, Daejeon,
 302-716, Korea

Outline Drawing

APL0000 Type

Type	Dimension
Standard (PLL IC + VCO)	19 x 19 x 5.8

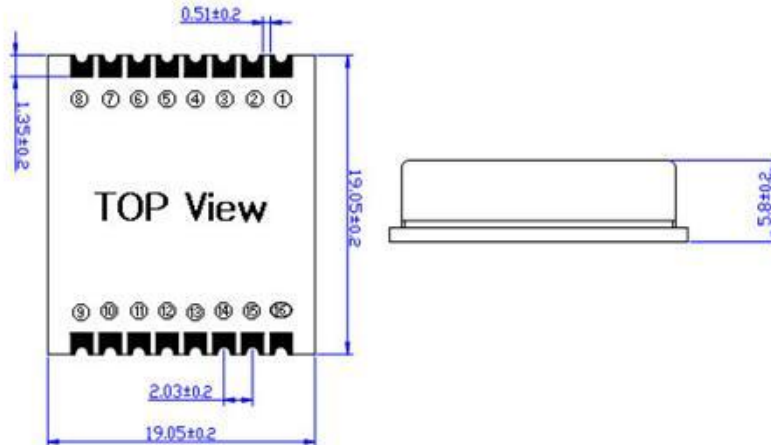

Pin Out for PLL			
Pin No.	Application	Pin No.	Application
1	CLOCK	9	VCC (VCO)
2	DATA	13	RF OUT
3	ENABLE	15	VCC (PLL)
4	OSC IN	16	LOCK DETECT
All other Pins are Grounded			

