



50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts

TECHNICAL DATA SHEET

PE2093

50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts

Configuration

Input Connector	N Female
Input Connector Specification	MIL-STD-348
Output Connectors	N Female
Output Connectors Specification	MIL-STD-348
Frequency Range, GHz	0.69 to 2.7
Design	Wilkinson
Number of Output Ports	3
Housing Material and Plating	Aluminum

Electrical Specifications

Frequency Range, GHz	0.69 to 2.7
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.8
Maximum Input Power, Watts	10
Maximum Input VSWR	1.4:1
Maximum Output VSWR	1.25:1
Minimum Isolation, dB	22
Phase Balance, Degrees	± 6
Flatness, dB	0.4

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +85
------------------------	------------

Size

Length, in [mm]	4.8 [121.92]
Width, in [mm]	3 [76.2]
Height, in [mm]	0.82 [20.83]
Color	Blue

Input Connector

Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Brass
Body Material and Plating	Brass

Output Connectors

Contact Material and Plating	Beryllium Copper, Gold
Connector Material and Plating	Brass
Body Material and Plating	Brass

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts PE2093](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts

TECHNICAL DATA SHEET

PE2093

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant Yes

Plotted and Other Data
Notes:

Values at 25 °C, sea level

50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts PE2093](http://www.pasternack.com/3-way-n-wilkinson-power-divider-690-mhz-2.7-ghz-10-watts-pe2093-p.aspx)

URL: <http://www.pasternack.com/3-way-n-wilkinson-power-divider-690-mhz-2.7-ghz-10-watts-pe2093-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2093 CAD Drawing

50 Ohm 3 Way N Wilkinson Power Divider From 690 MHz to 2.7 GHz Rated at 10 Watts

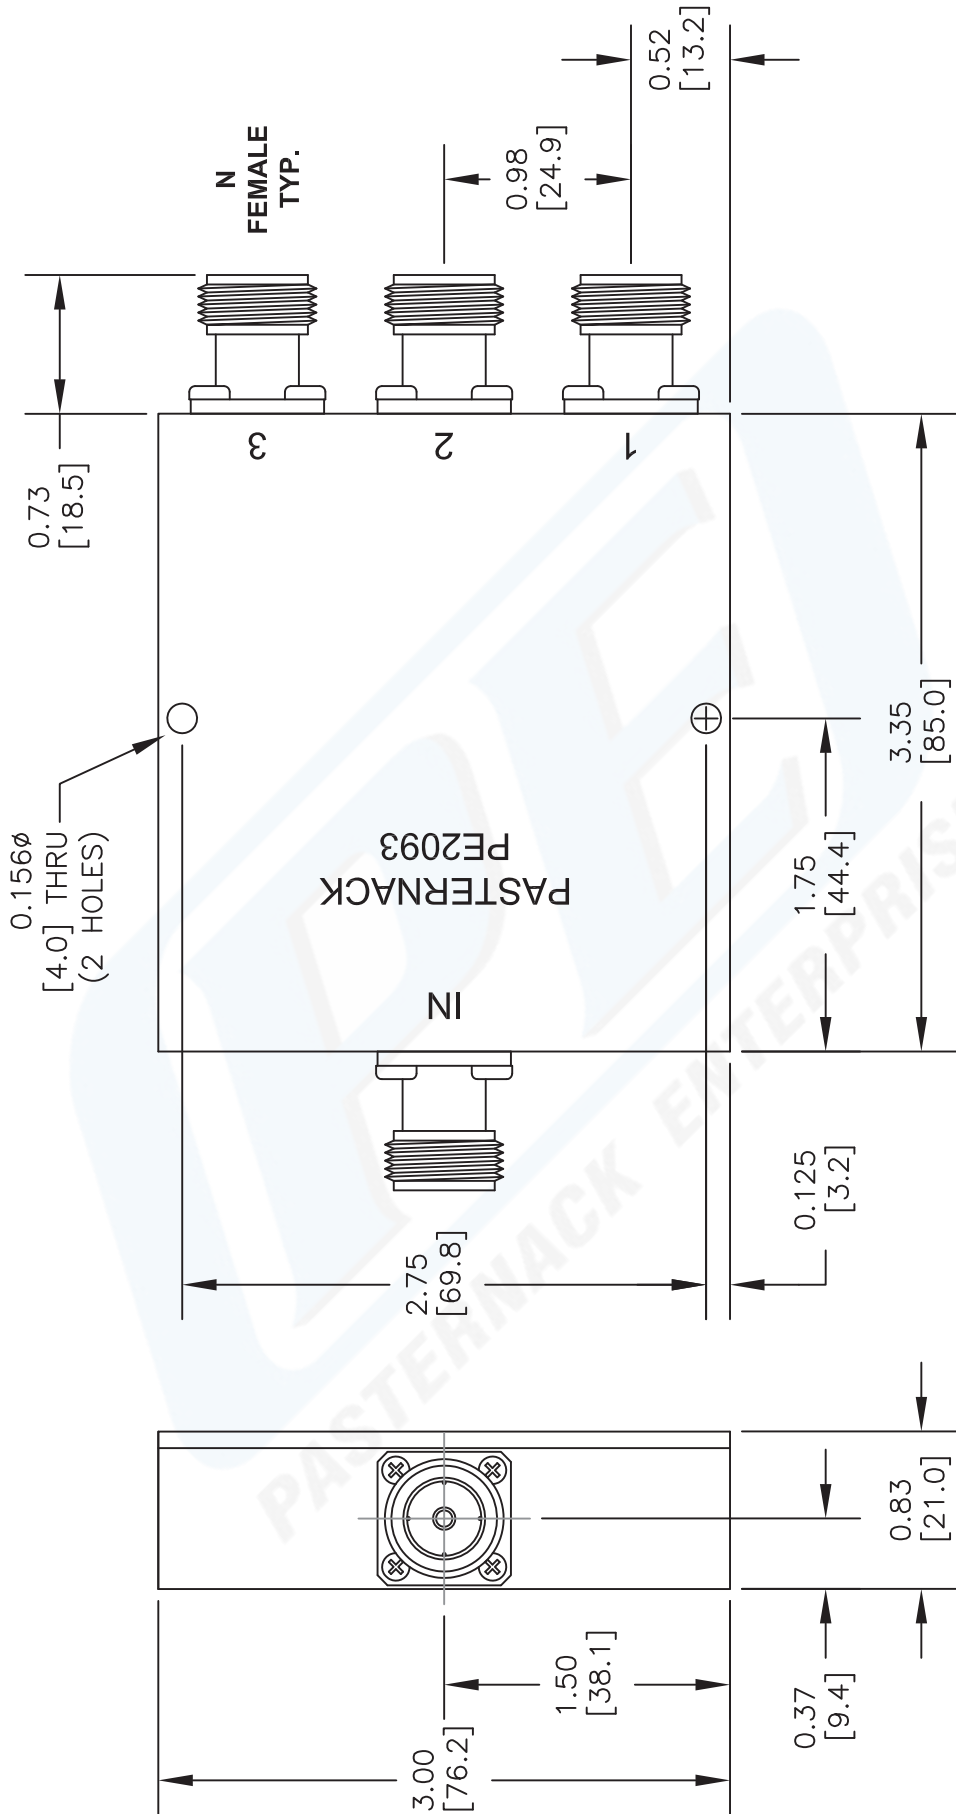

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE2093

FSCM NO. 53919

CAD FILE 100213

SCALE N/A

SIZE A

150

PE PASTERNAK[®]
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com