


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

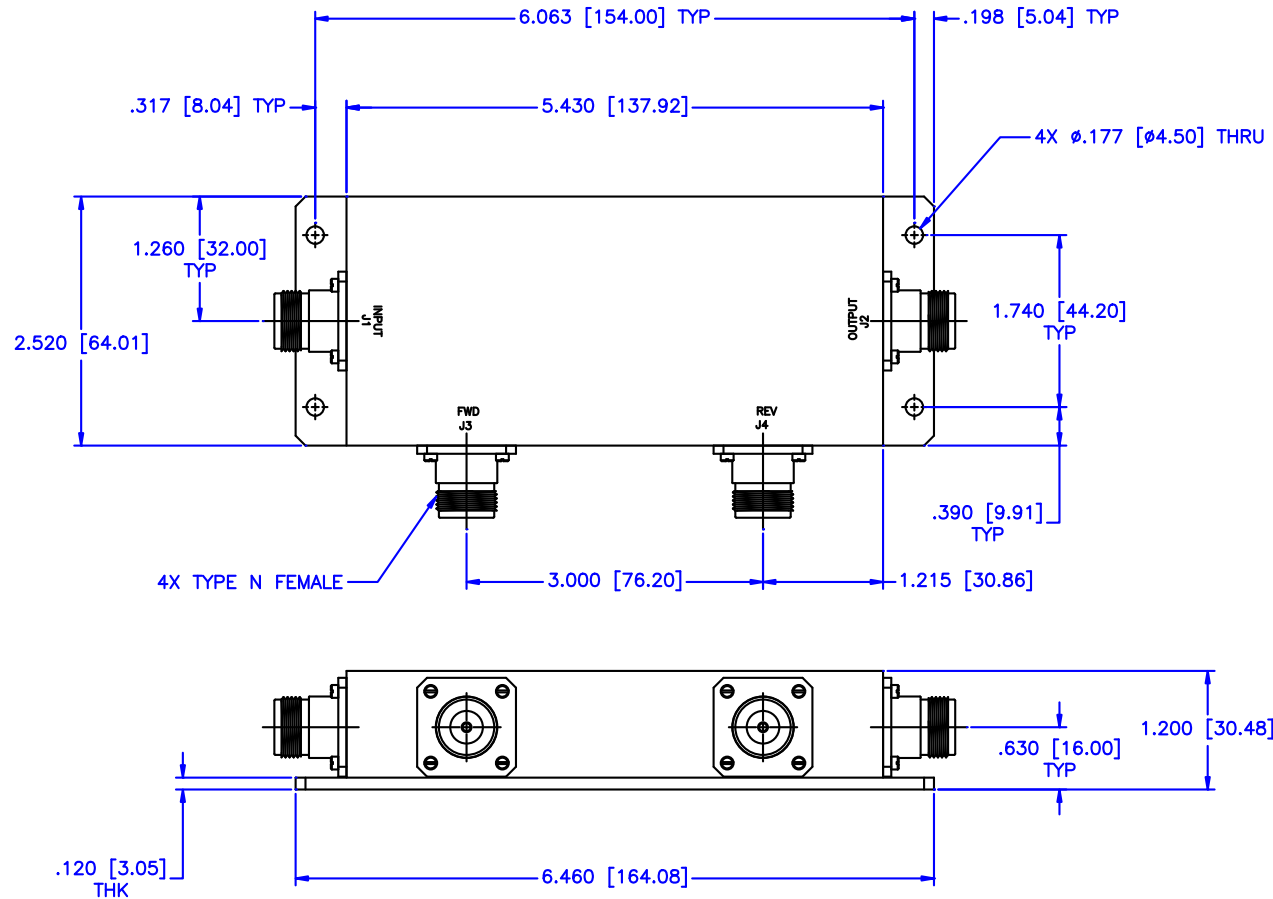

SPECIFICATIONS

FREQUENCY RANGE: 0.5–32 MHz
 FREQUENCY SENSITIVITY: ± 0.30 dB
 INSERTION LOSS: 0.30dB Max.
 DIRECTIVITY: 25dB Min.
 VSWR PRIME LINE: 1.05:1 Max.
 POWER: 1500 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO. HDL-14-30	
DATE: 03-27-1999		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 03-27-1999	
THIRD ANGLE PROJECTION		SIZE: C REV: N/A DWG NO.: 81251	
DO NOT SCALE THE DRAWING			