


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

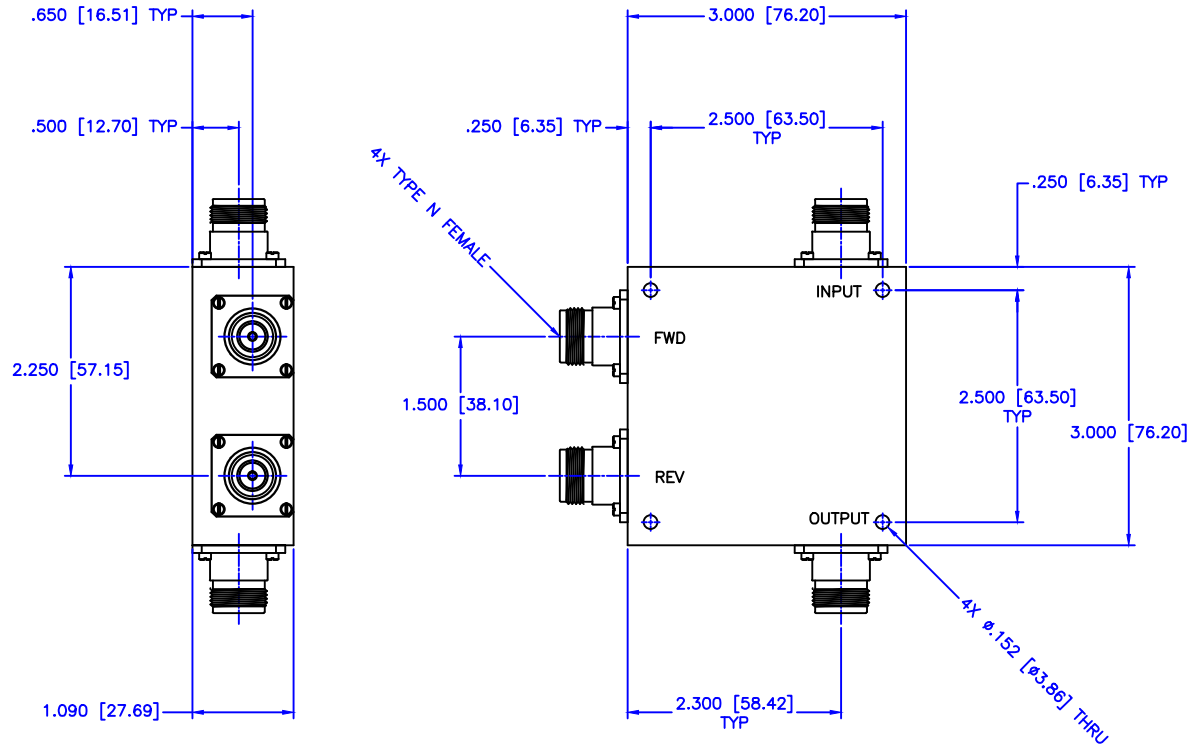

SPECIFICATIONS

- Frequency Range: 800–2000 MHz
- Coupling: 40±1.0dB Nom.
- Insertion Loss: 0.30dB Max.
- Power: 500 Watts CW
- VSWR: 1.20:1 Max.
- Sensitivity: ±0.30dB
- Directivity: 20dB Min.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER			SHEET: N/A
PART NO. HDL-9-40		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan DATE: 08-06-2014	DATE: 08-06-2014	THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	
APPROVED: T. Nguyen DATE: 08-06-2014		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING
		DWG NO. 81229	