


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	

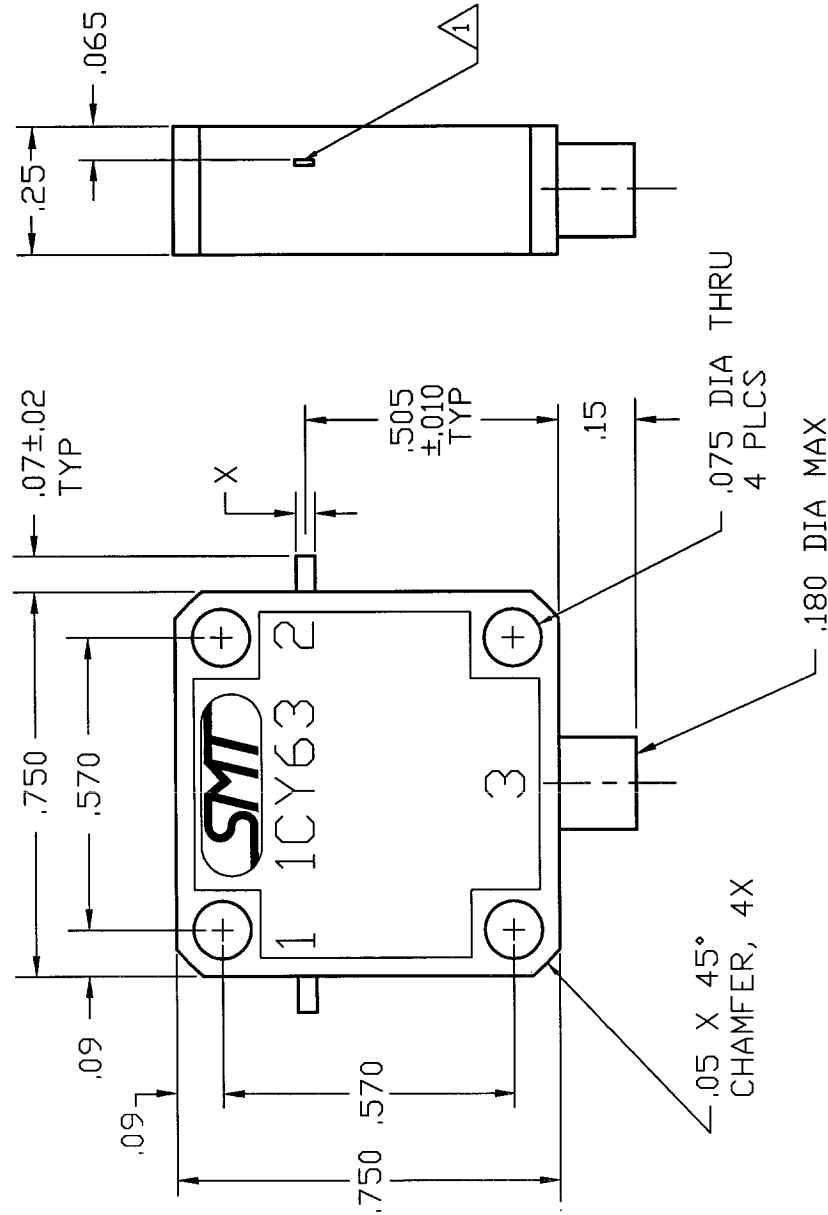

SPECIFICATIONS

1. FREQUENCY RANGE.....1.7 TO 2.1 GHz
2. VSWR.....1.25:1 MAX
3. ISOLATION.....20 dB MIN
4. INSERTION LOSS.....0.4 dB MAX
5. TEMPERATURE
 OPERATING.....-54° TO +100°C
 STORAGE.....-54° TO +100°C
6. LOAD RATING.....4 WATTS MIN.
 @85°C HEATSINK TEMPERATURE

2. CASE: STAINLESS STEEL NICKEL PLATED.

1. TABS ARE .005±.001 THK. Be Cu, GOLD PLATED.

NOTES:

QTY	FSCM RECD. NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
			PARTS LIST	
			SMT SIERRA MICROWAVE TECHNOLOGY	
			OUTLINE FOR SDI1721	
			SIZE	DWG. NO.
			B	1CY63
			SCALE	SHEET
				205-1085-001
				REV.

FRACTIONS	DECIMALS	ANGLES	APPROVALS	DATE
±	.XXX ± .01	±		
	.XXX ± .005		DRAWN J. DARJES	
MATERIAL			CHECKED	
FINISH			ISSUED	
203-0071-001	SDI1721			
NEXT ASSY	USED ON			
	APPLICATION			