


## HIGH POWER TERMINATION

### S3K250050-LF

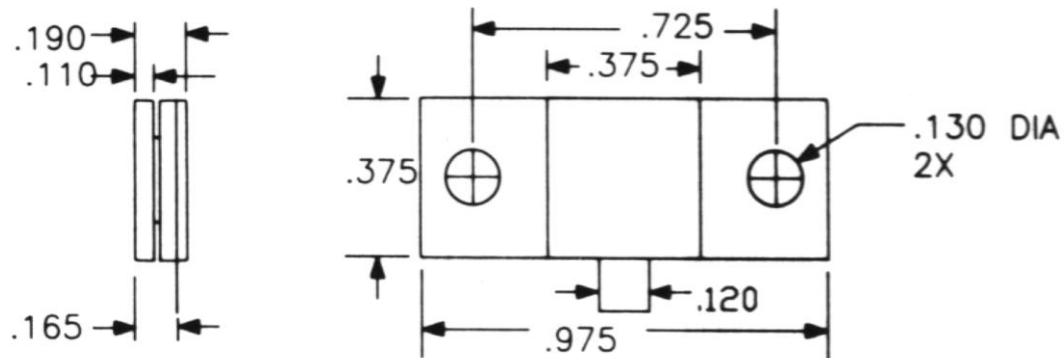

Electrical Specifications		Material Specifications		General Specifications	
<b>RFT P/N Marking</b>	S3K-LF 50	<b>Substrate</b>	BeO	<b>Mechanical Tolerance</b>	±.010"
<b>Power (Watt)</b>	250	<b>Flange</b>	Copper with Nickel Plating	<b>Tolerance</b>	±5%
<b>Resistance (Ohm)</b>	50	<b>Tab</b>	Nickel with Silver plating	<b>Power Handling</b>	250 W @ 100°C 0 W @ 180°C
<b>Frequency (GHz)</b>	2	<b>Cover</b>	Alumina	<b>Construction</b>	Lead free solder
<b>VSWR</b>	DC – 1 GHz: 1.25:1 1 – 2 GHz: 1.35:1	<b>Resistive Element</b>	NiCr	<b>RoHS Compliance</b>	Yes

All dimensions are in inches. Minimum lead length is 0.125". Call for other values. 1% & 2% resistance tolerances available.