


- 1.0 PERFORMANCE  
 1.1 FREQUENCY RANGE: DC-300 MHz  
 1.2 VOLTAGE RATING: 500V RMS (sea level)  
 1.3 NOMINAL IMPEDANCE: NON-CONSTANT  
 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)  
 1.5 TEMPERATURE RANGE: -55°C TO +165°C

- 2.0 MATERIALS  
 2.1 DIELECTRIC: TEFLON, ASTM-D-1710  
 2.2 CENTER CONTACT: PHOSPHOR BRONZE PER ASTM-B-139, ALLOY B2  
 2.3 LOCKING RING: PHOSPHOR BRONZE PER ASTM-B-139, ALLOY 510  
 2.4 OTHER METAL PARTS: BRASS PER ASTM-B-16

- 3.0. FINISHES  
 3.1 CENTER CONTACT: SEE TABLE  
 3.2 ALL OTHER METAL PARTS: SEE TABLE

DWG NO. OL-0610-02-1		REV. A
PLATING VARIATIONS		
PART NUMBER	BODY	CONTACT
0610-02	SILVER	SILVER

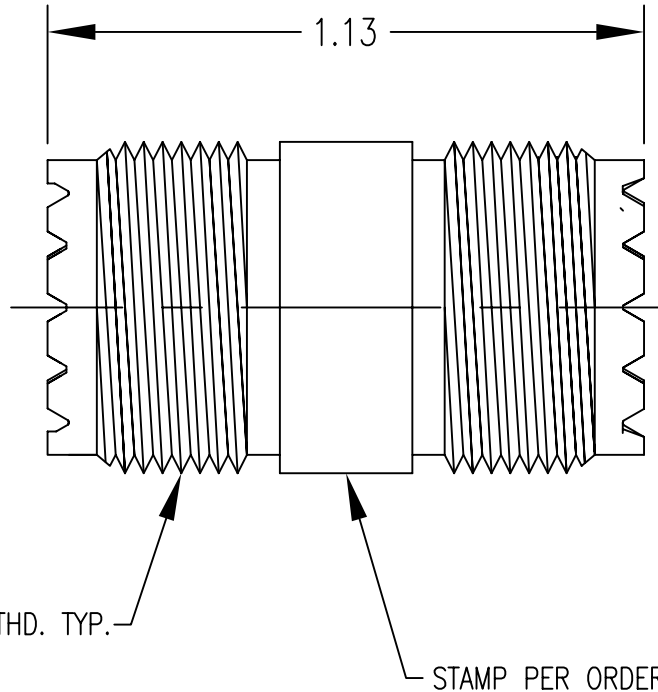

5/8-24 UNEF-2A THD. TYP.

STAMP PER ORDER


DO NOT SCALE DRAWING

A	ORIGINAL	NEW	x	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Rev.	Revisions	Disp.	Date	Dwn.	Appd.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED.

UNLESS OTHERWISE SPECIFIED:  
 ALL DIMENSIONS ARE IN INCHES.  
 ALL DIMENSIONS ARE AFTER PLATING.  
 .XXX= ±.005 ALL MACHINED SURFACES <sup>63</sup>/ MAX.  
 .XX= ±.01 ANG.±1/2° FRACTIONAL= ±1/64

⓪ .004 MAX. TIR.      ⊥ AXIS .001



THIRD ANGLE PROJECTION

DWN	LAP	1/18/05
CHKD	SJS	1/18/05
APPR	FSH	1/18/05

 **SAN-TRON, INC.**  
 4 NEWBURYPORT TPK. IPSWICH MA USA 01938  
 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573  
 WWW. santron.com E MAIL: santron@santron.com

TITLE  
 UHF ADAPTER STRAIGHT (F-F)

MATERIAL:      FINISH:  
 SEE NOTES      SEE NOTES

CAGE CODE: 50896	DWG NO.	REV.
SCALE X:X	OL-0610-02-1	A