



RF-LAMBDA

The power beyond expectations


RFDUP081003

HIGH POWER CAVITY DUPLEXER 825-835MHZ & 870-880MHZ

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



HIGH POWER CAVITY DUPLEXER 825-835MHZ & 870-880MHZ

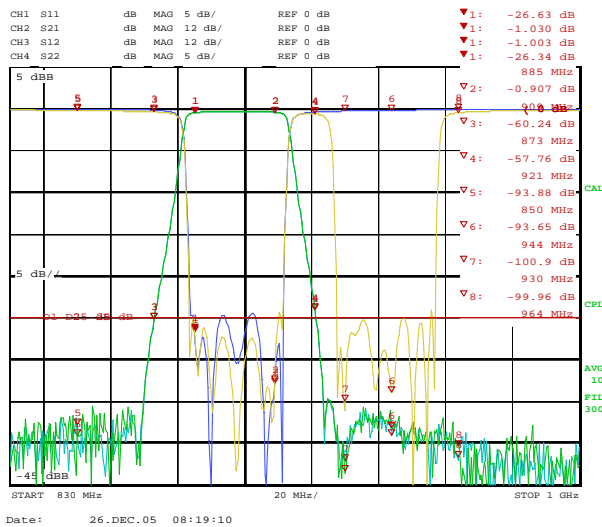

Electrical Specification

- Frequency Range:** RX: 825-835MHz
TX: 870-880MHz
- Insertion Loss:** 2.0dB max
- Pass band Ripple:** 0.8dB maximum
- Return Loss:** ≤20dB
- Power Handle:** 50W
- Channel Rejection:** 85dB
- Offset Rejection:** 65dB

