

TERMINATION 6GHZ 2 WATTS SMA-MALE

ST0625

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-6 GHZ
VSWR @ 6 GHZ: 1.2:1 MAX
POWER (AVG) 2.0 WATTS @ 25 DEG C
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +125C


MECHANICAL:

MATERIAL BODY: GOLD PLATED BRASS
CENTER CONTACT: GOLD PLATED PER MIL-G-45204
RESISTIVE ELEMENT: THIN FILM ON ALUMINA SUBSTRATE
RECOMMENDED TORQUE: 5-7 IN-LBS

ROHS COMPLIANT

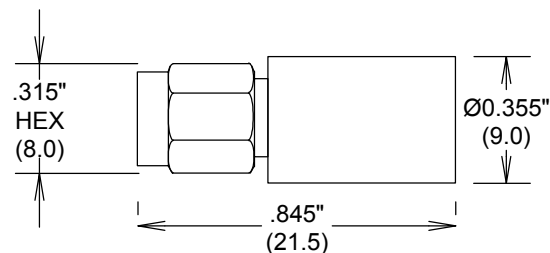

MEASUREMENTS BELOW ARE TYPICAL

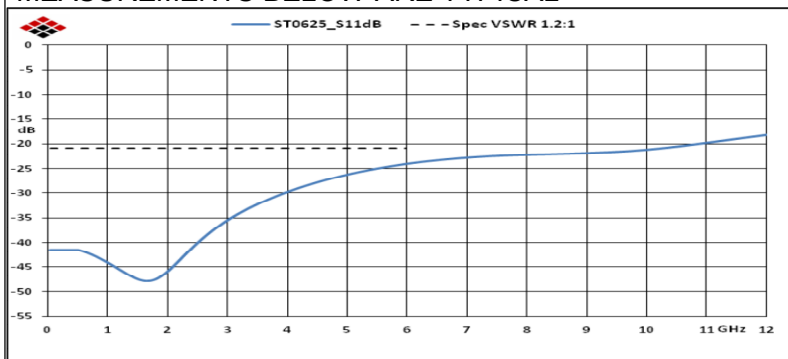

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TERMINATION 6GHZ 2 WATTS SMA-MALE

SIZE

A

CAGE CODE

3FKR5

DWG NO

ST0625

REV

A

SCALE

SHEET