



3rd ANGLE PROJECTION



DRAWING TO BE READ IN CONJUNCTION WITH BS 8888

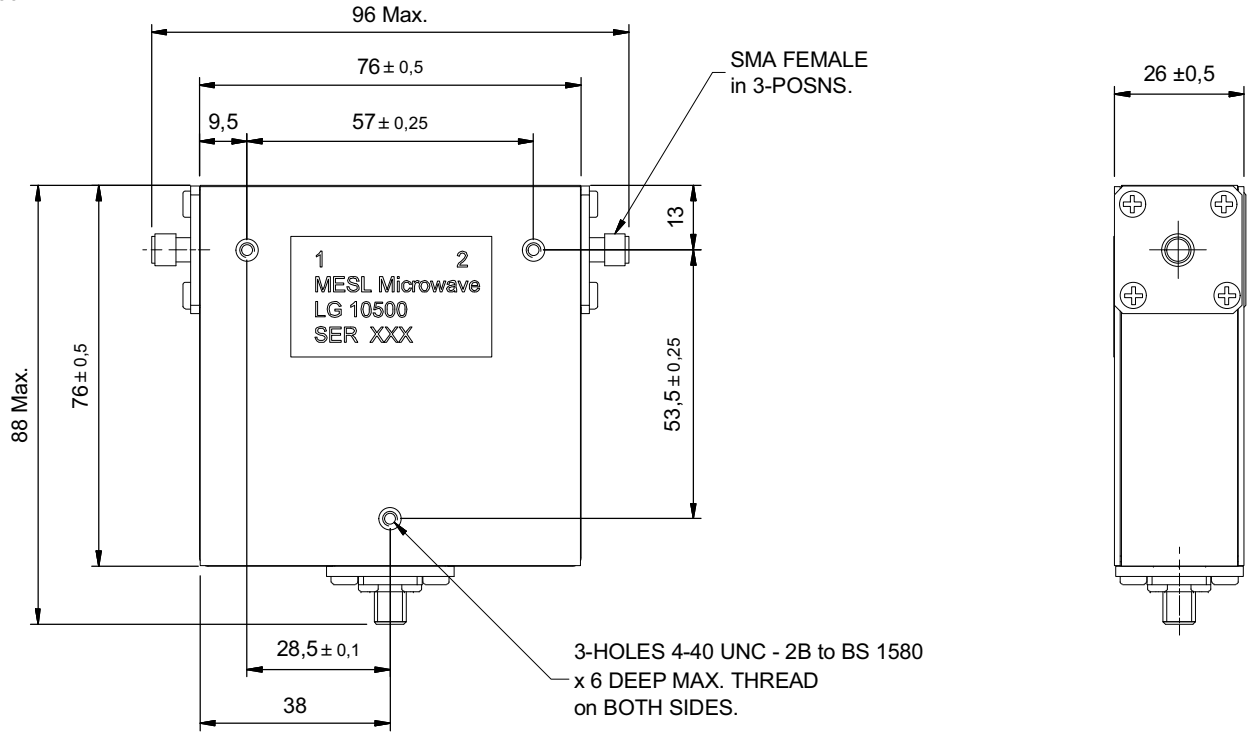

Q.A.
DATE
PROD.REL.
DATE
ENG.APP.
DATE

FREQUENCY	TYPICAL			-10 to +65C.		
	INSERTION LOSS	RETURN LOSS	ISOLATION	INSERTION LOSS	RETURN LOSS	ISOLATION
1 to 2GHz.	0.5 dB Max.	19 dB Min.	19 dB Min.	0.6 dB Max.	16 dB Min.	16 dB Min.

B	14.12.09	DRN 10500
ISSUE	DATE	MOD NUMBER

NOTES : THIS UNIT IS RoHS COMPLIANT by DESIGN.
LIGHTLY REMOVE ALL BURRS AND SHARP EDGES U.O.S.

THIS DRAWING IS MESL Microwave Ltd. PROPERTY.
IT MAY NOT BE COPIED OR EXHIBITED WITHOUT WRITTEN PERMISSION.

A 3

MECH.ENG.	ORIGINAL SCALE 1:1 DO NOT SCALE PRINT	MATERIAL	SPECIFICATION	GENERAL TOLERANCE U.O.S. (ISO2768-MH) 0 - 6.0 : +0.05 120.0 - 400.0 : +0.2 6.0 - 30.0 : +0.1 400.0 - 1000.0 : +0.3 30.0 - 120.0 : +0.15 1000.0 - 2000.0 : +0.5 Angular Dim : ±0.5° Symmetry ±0.05	RESPONSIBLE AUTHORITY	SECURITY CLASSIFICATION
DATE						
DRAWN AB.	MASS (kg): N/A DENSITY (g/cm ³): N/A	FINISH BODY / LID & PLATES : SURTEC 650 Chromital.	SPECIFICATION	FINISH TO BE 1.6/√ U.O.S.	TITLE	CONTRACTORS DRAWING NUMBER
DATE	05/11/09			DIMENSION IN mm	2 GHz COAXIAL CIRCULATOR OUTLINE TYPE LG 10500	10500-000-OL
						SERVICE DRAWING NUMBER SHEET No. 1 OFF 1