

BNC/F 2 WATT TERMINATION 3 GHZ

ST3B-F

SPECIFICATIONS

ELECTRICAL


FREQUENCY: DC-3 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.2 MAX @ 3 GHZ
POWER HANDLING: 2 WATTS CW @ 25°C
DERATED LINEARLY TO 1 WATT AT 125°C
INTERFACE: MIL-STD-348

MECHANICAL


MATERIALS BODY : BRASS
BODY PLATING: TRIMETAL
MATERIALS CONTACTS: BRASS
PLATING CONTACTS: Au PER MIL-G-45204

OPERATING TEMPERATURE: -55° to 125°C

ROHS COMPLIANT

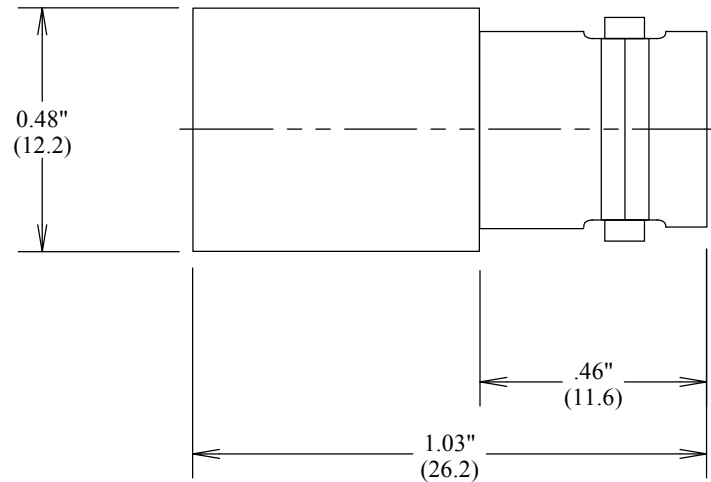

MEASUREMENTS BELOW ARE TYPICAL

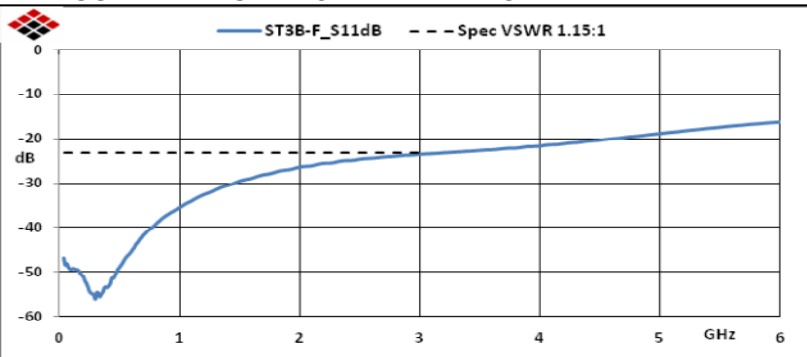

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

BNC/F 2 WATT TERMINATION 3 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	ST3B-F	A
SCALE			SHEET