

KR Electronics 2521-3 Bandpass

General Description


KR 2521-3 is a 80 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 16 MHz and is designed for 50 Ω source and load impedance. Other center frequencies and bandwidths are available. Please consult the factory.

Features


- 80 MHz Bandpass
- 50 Ω
- SMA Connectors

Typical Performance

Passband Amplitude
(1 dB/div)

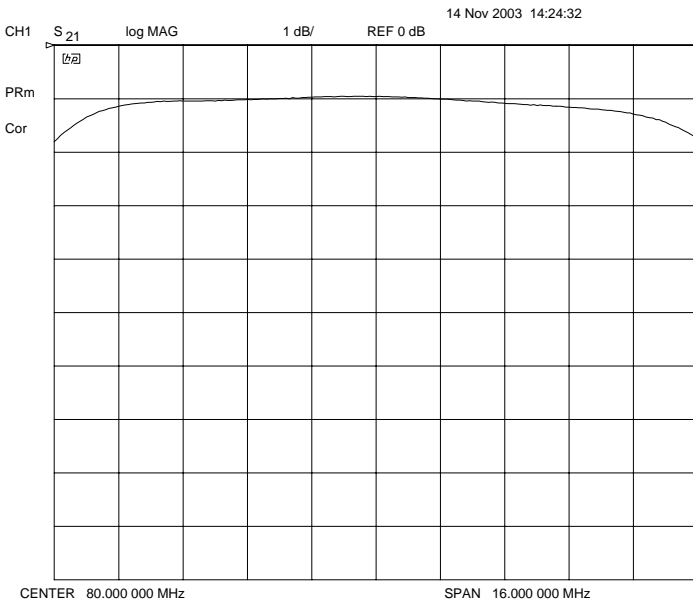

Overall Response
(5 dB/div)

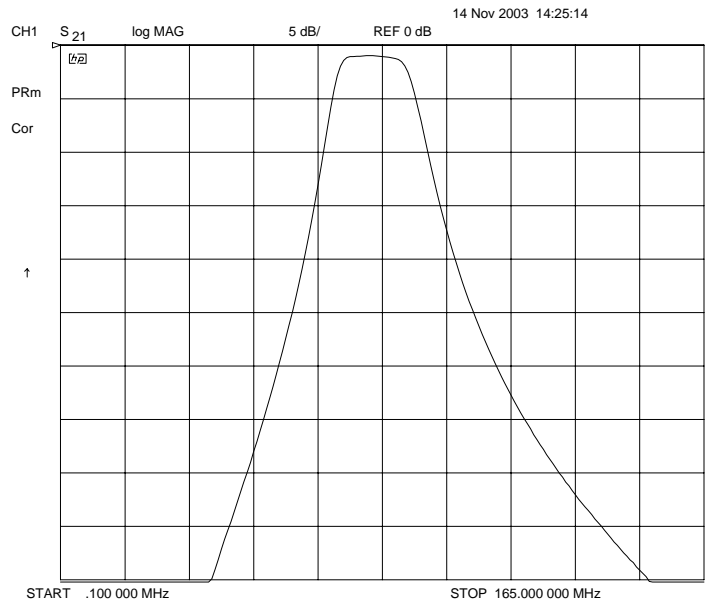

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2521-3

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	80 MHz
Insertion Loss	< 3 dB (1 dB Typ)
3 dB Bandwidth	16 MHz min
Source & Load	50 Ω

Physical Dimensions

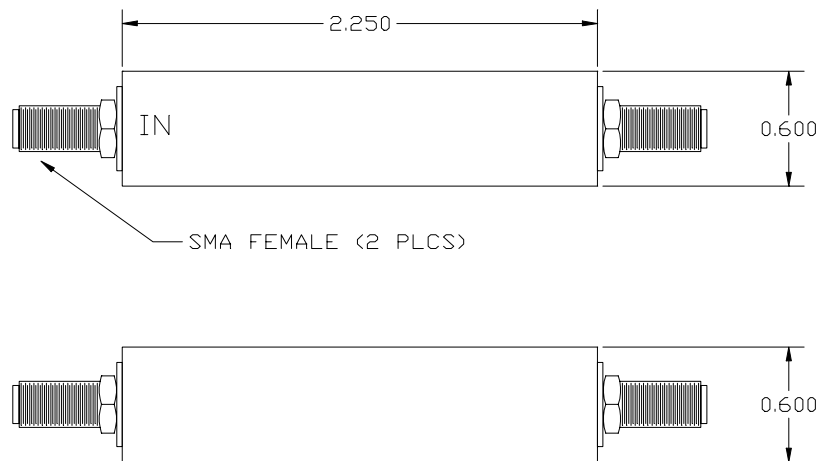

TOLERANCE UNLESS SPECIFIED ±0.010"