


Features

- Wideband PLL
- 3 wire serial integer PLL
- 1.0"x1.25"x0.2"
- Low phase noise
- Programming : ADF4113(ADI)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

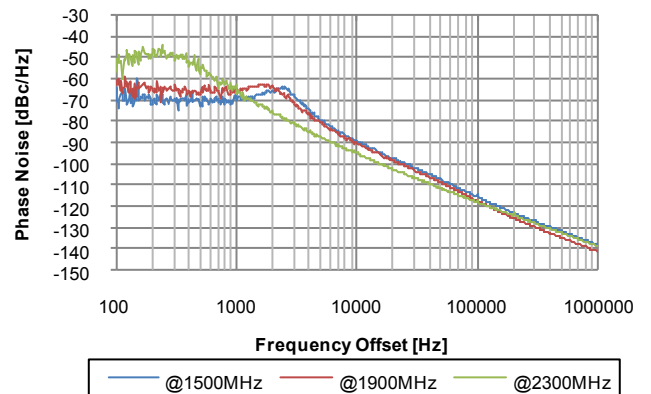


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1500		2300
Step Size	kHz		100	
Settling Time	msec		10	30
Output Power	dBm	+3.0	+6.0	+9.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-63	-58
	@10kHz offset	dBc/Hz	-89	-84
	@100kHz offset	dBc/Hz	-116	-111
	@1MHz offset	dBc/Hz	-139	-134
2nd Harmonic Suppression	dBc		-24	-15
Sideband Spurious Suppression	dBc			-70
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	12	
	Current	mA	33	40
PLL Power Supply (Vcp)	Voltage	Vdc	12	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

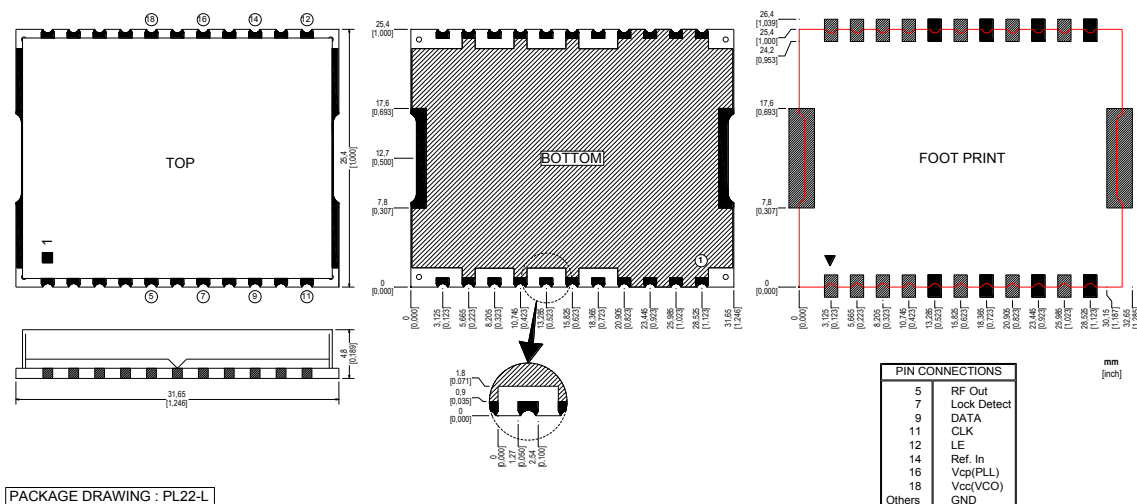


PACKAGE DRAWING : PL22-L


Harmonic Suppression - @1500MHz

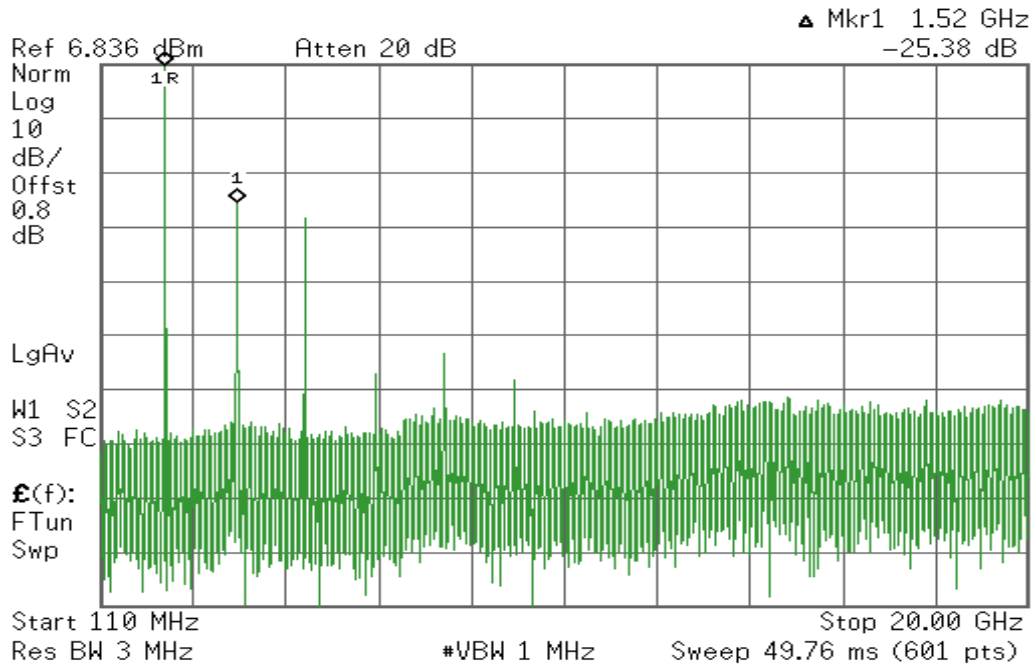


Sideband Spurious Suppression - @1500MHz

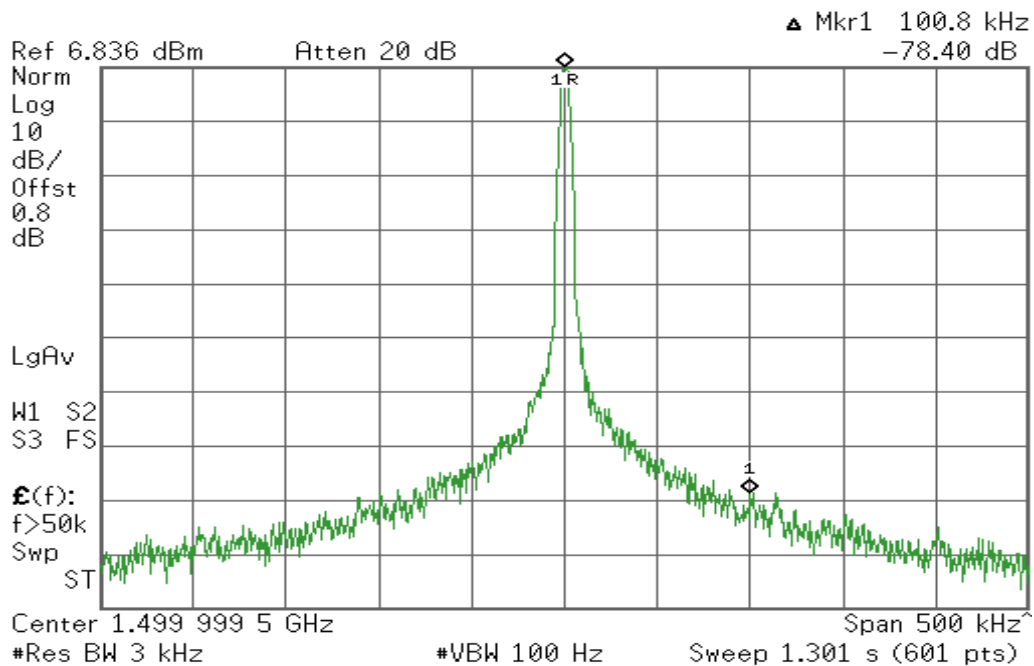


Harmonic Suppression - @1900MHz

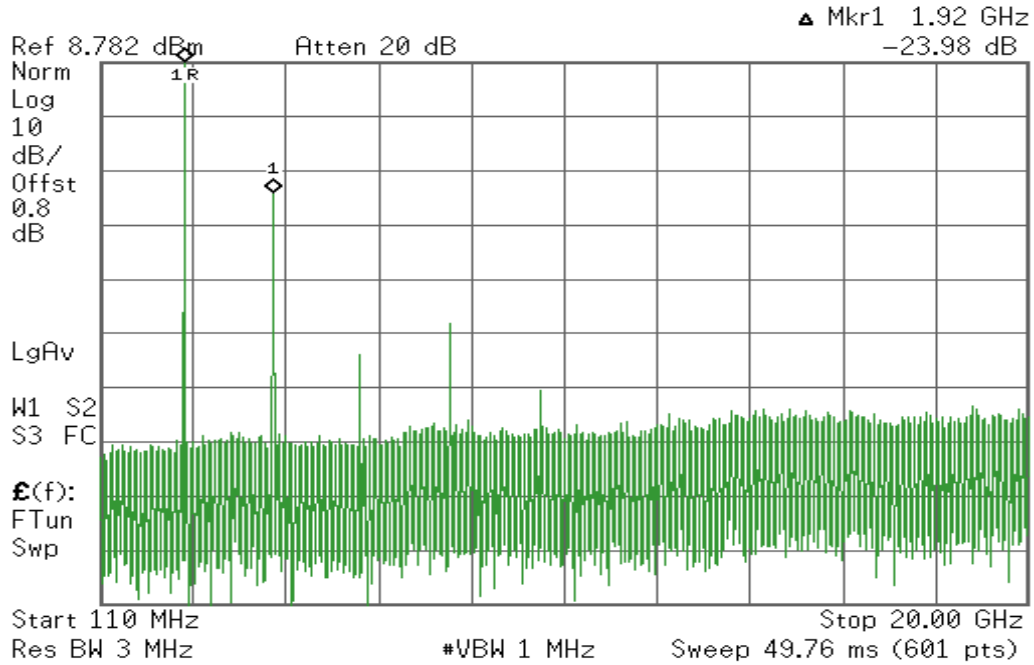

Sideband Spurious Suppression - @1900MHz

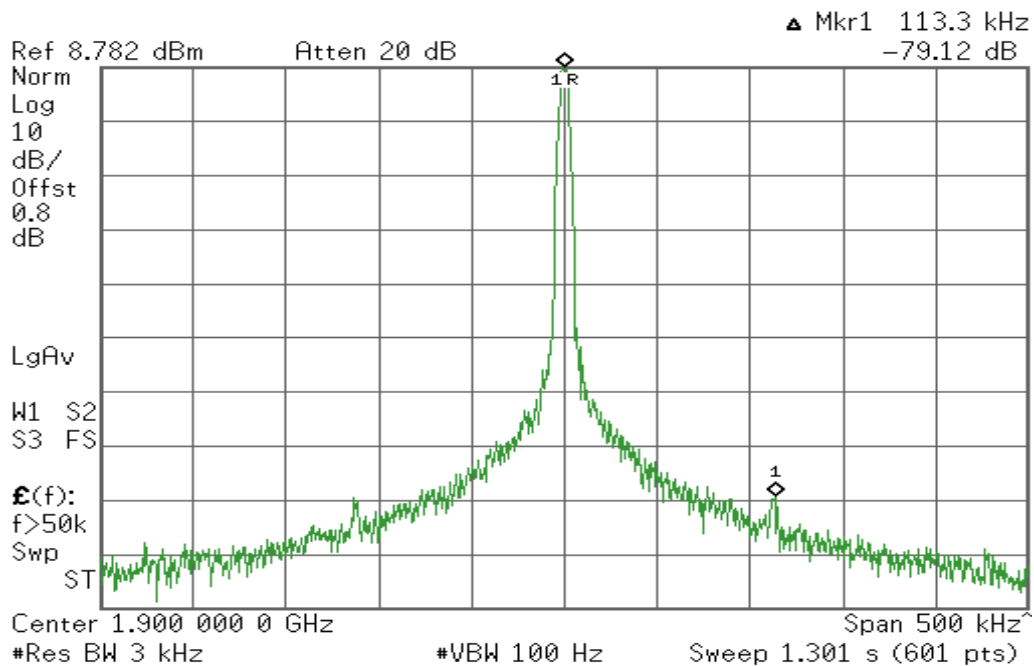

Harmonic Suppression - @2300MHz

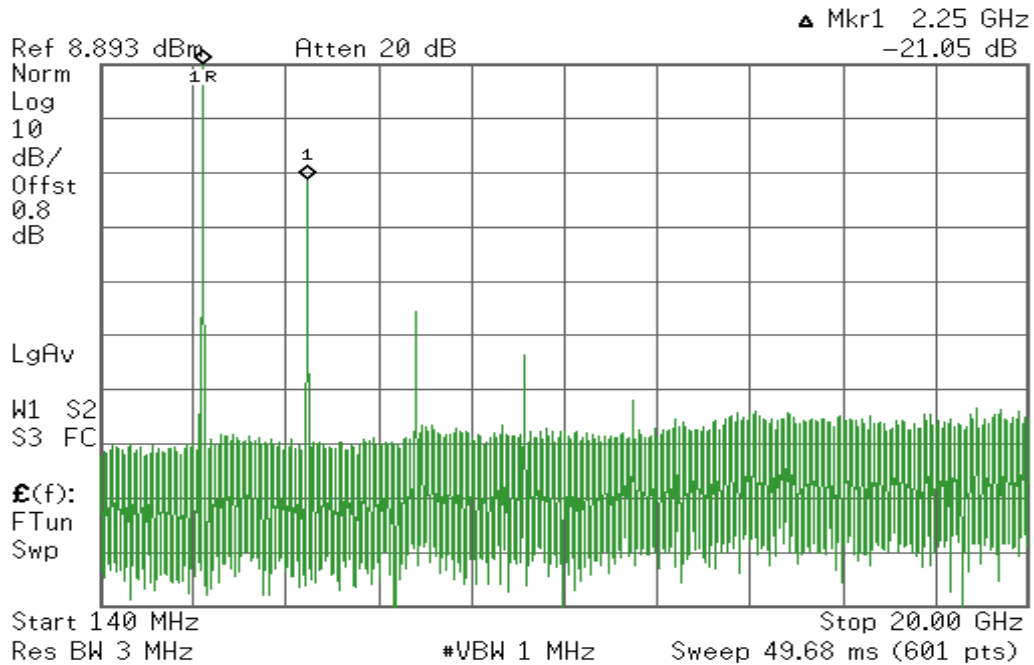

Sideband Spurious Suppression - @2300MHz

