

TERMINATION SMA-M REVERSE POLARITY

ST0672


SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
VSWR @ 6 GHZ: 1.20:1 MAX
POWER (AVG) 1.0 WATTS @ 25 DEG C;
1/2 WATT @ 125 DEG C
POWER (PEAK) 1KW/50 MICRO-S
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +125C

MECHANICAL:

MATERIAL COUPLING NUT: TRIMETAL PLATED BRASS
MATERIAL BODY: TRIMETAL PLATED BRASS
CENTER CONTACT: BeCu
CENTER CONTACT: GOLD PLATED PER MIL-G-45204
RECOMMENDED TORQUE: 5-7 IN-LBS

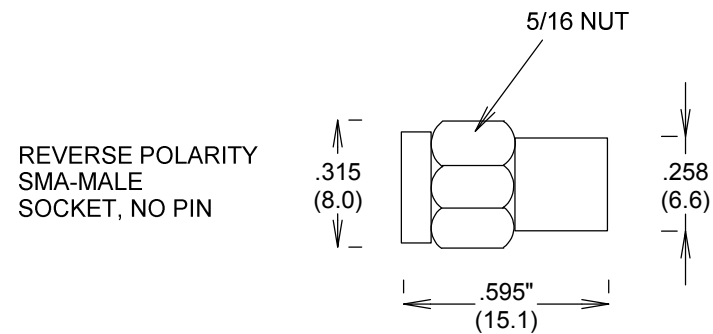

MEASUREMENTS BELOW ARE TYPICAL

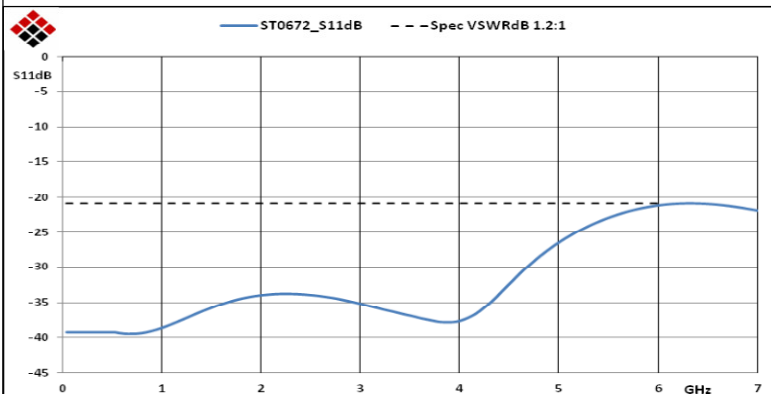

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TERMINATION SMA-M REVERSE POLARITY

SIZE CAGE CODE DWG NO

A

3FKR5

ST0672

REV

A

SCALE

SHEET