


Features:

- Broad band, low noise, and high gain
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Operating temperature -40~+85°C, storage temperature -55~+125°C

Electrical Specifications

Frequency Range	500 MHz to 3000 MHz
Noise Figure	1.3 dB typical
P-1dB Compression Point	+15dBm typical
Nominal Gain	33 dB min @25°C
Gain flatness	+/-1.0 dB typical
Gain Variation	+/-1.5 dB typical
Input VSWR	2.0:1 max
Output VSWR	2.0:1 max
Spurious	-60 dBc max
Operating Temperature	-40 to +85°C
Survival Temperature	-55 to +125°C
DC Power Supply	90 mA@+8~15 VDC
In/Out connectors	50 ohm SMA female
Size	1.50"x0.85"x0.375

Mechanical Structure:

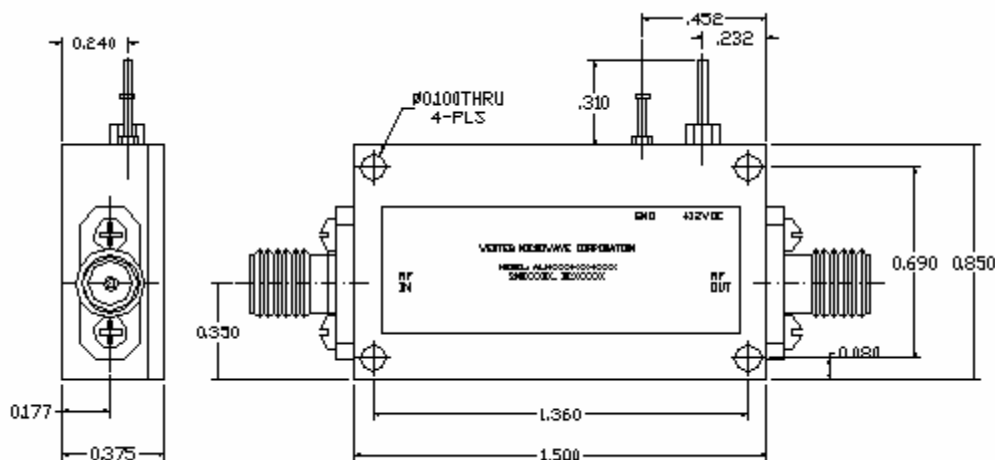

Note: All units in inches.