


Features

- 3 wire serial Fractional PLL
- Sub-Compact Size 0.6"x0.6"x0.15"
- Low phase noise
- Programming : LMX2326(NSC)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

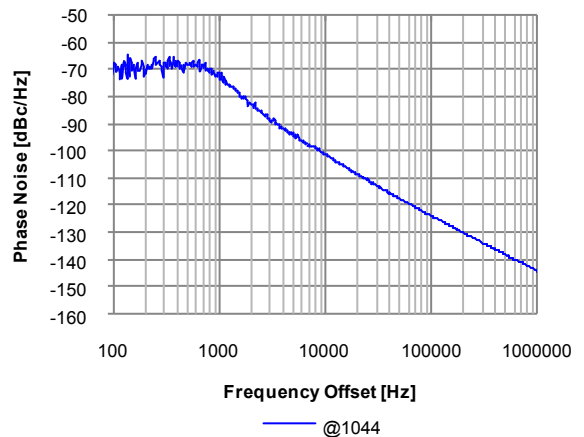


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1014		1074
Step Size	kHz		50	
Settling Time	msec		10	30
Output Power	dBm	-2.0	0.0	+2.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-75	-70
	@10kHz offset	dBc/Hz	-103	-98
	@100kHz offset	dBc/Hz	-123	-118
	@1MHz offset	dBc/Hz	-142	-137
2nd Harmonic Suppression	dBc		-43	-20
Sideband Spurious Suppression	dBc			-75
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	19	25
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

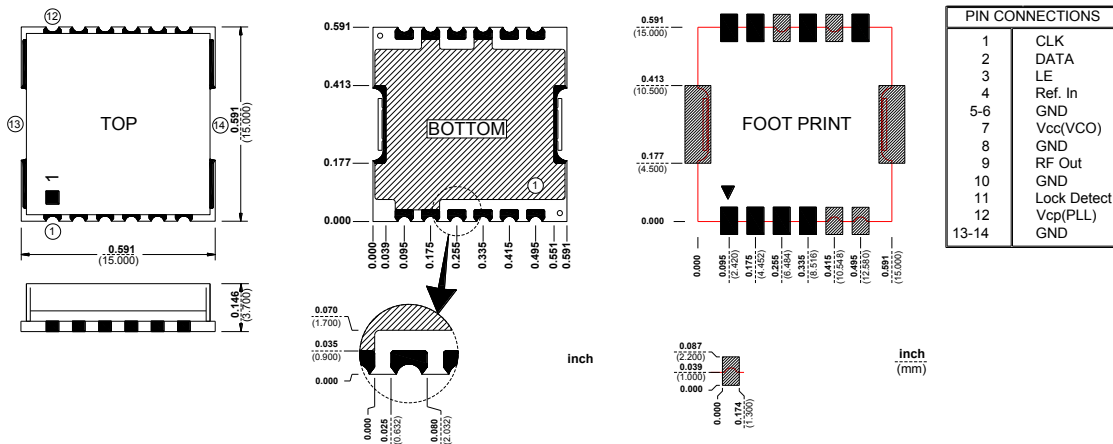

PACKAGE DRAWING : PS12-L

Harmonic Suppression

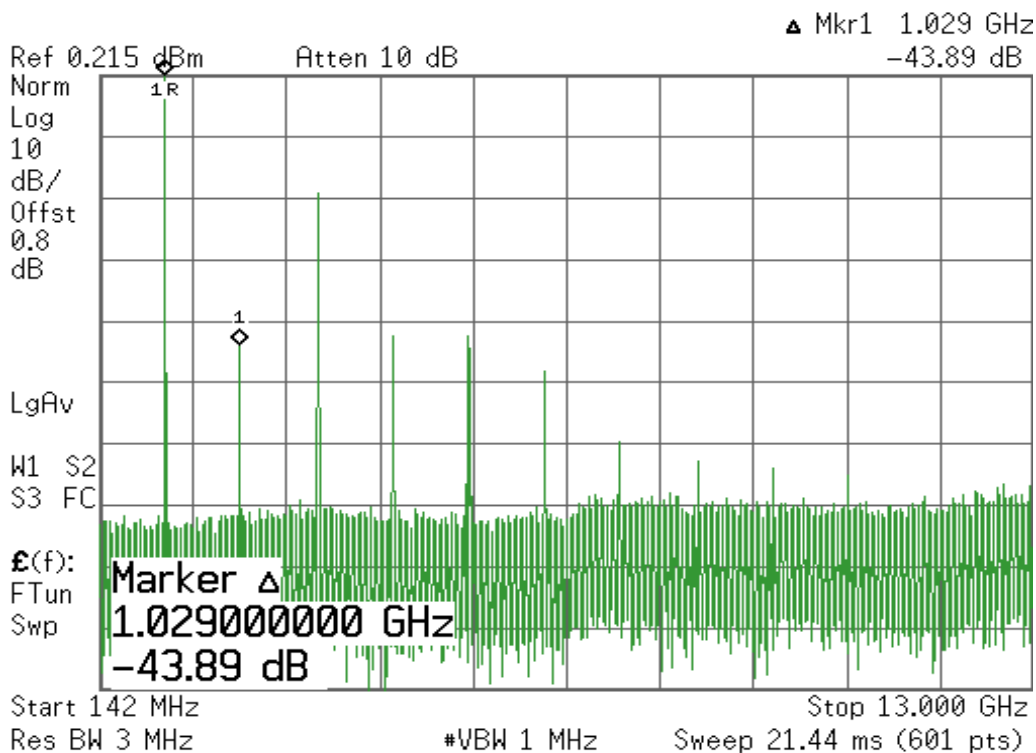

Sideband Spurious Suppression

