

# High Power Bi-Directional Coupler

## BDCA-10-25+ BDCA-10-25

50Ω 10dB Coupling DC Pass 800 to 2500 MHz



CASE STYLE: SM1L  
PRICE: \$5.95 ea. QTY (10)

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Available Tape and Reel at no extra cost**

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500
13"	500, 1000

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.25A

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED (forward)	10
COUPLED (reverse)	5
GROUND	2,3,4,7,8,9

### Outline Drawing




### PCB Land Pattern



### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.250	.300	.070	.320	.050	.015	.050	.075	
6.35	7.62	1.78	8.13	1.27	0.38	1.27	1.91	
J	K	L	M	N	P	Q	R	wt
.030	.095	.330	.100	.020	.015	.070	.014	grams
0.76	2.41	8.38	2.54	0.51	0.38	1.78	0.36	0.3

### Demo Board MCL P/N: TB-115+ Suggested PCB Layout (PL-004)



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- four-port coupler
- wideband, 800 to 2500 MHz
- excellent VSWR, 1.05:1 typ. all ports
- good flatness, ±0.6 dB typ.
- excellent power handling capability, 50W (800-1000 MHz)
- hermetically sealed
- minimal variation with temperature variation
- low profile, 0.07" height
- protected by US Patent 7,049,905
- DC current through input to output 0.25A Max. at 1.0 watt RF input power.

### Applications

- cellular, PCS, PCN, UMTS
- ISM
- GPS




### Bi-Directional Coupler Electrical Specifications

FREQUENCY (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT <sup>2</sup> (W)
	Nom.	Max. Flatness	Typ.	Max.	Typ.	Min.		
$f_c - f_u$								
800-2500	10.1±2.0	±2.0	1.0	1.5	22	14	1.05	24
800-1000	11.0±0.8	±1.2	0.6	1.0	22	18	1.05	50
1700-2000	8.5±0.5	±0.6	1.1	1.5	23	19	1.05	34
2000-2500	9.4±1.2	±1.5	1.0	1.5	22	14	1.05	24


1. Includes theoretical power loss of 0.46 dB at 10 dB coupling.  
2. Derate linearly 1/3 at 100°C

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
		In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd
800.00	0.56	11.83	11.88	20.59	21.17	22.99	29.46	22.90	23.30
900.00	0.64	11.11	11.16	20.65	21.33	22.69	28.57	22.52	22.87
1000.00	0.72	10.52	10.58	20.79	21.48	22.57	27.38	22.33	22.55
1100.00	0.79	10.03	10.10	20.92	21.62	22.77	25.93	22.47	22.63
1300.00	0.90	9.32	9.43	21.40	21.66	23.38	24.65	23.22	23.01
1500.00	0.99	8.89	9.04	21.96	21.15	24.32	25.75	24.26	23.65
1700.00	1.05	8.70	8.92	22.46	20.21	25.42	27.72	25.30	24.11
2000.00	1.08	8.86	9.21	22.63	18.42	25.54	35.50	25.58	23.07
2200.00	1.06	9.27	9.77	22.30	17.02	23.92	39.80	24.56	20.95
2500.00	1.01	10.40	11.25	19.70	13.69	20.32	28.28	20.94	17.14

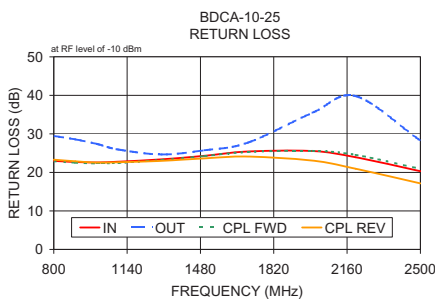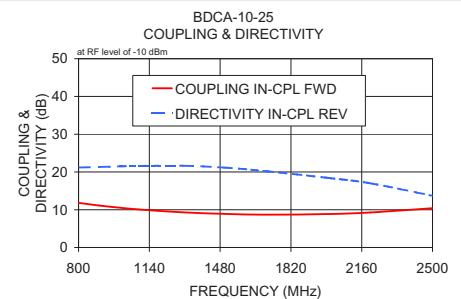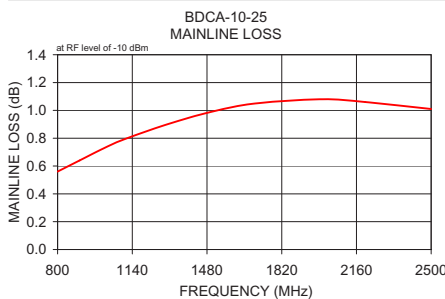

### Electrical Schematic

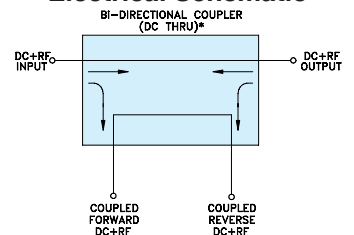

\* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

**Mini-Circuits**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. H  
M129277  
ED-8914/2  
BDCA-10-25  
LC/TD/CP/AM  
120921