



**DECADES AHEAD<sup>®</sup>**  
high power RF devices




**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

**Absorptive VHF Low Pass Filter**

**Model AF9255**

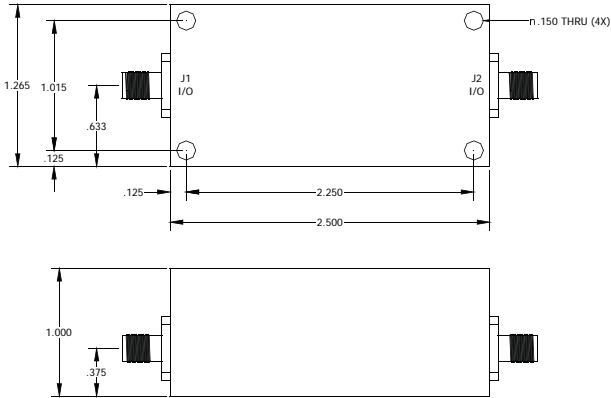

Frequency:	10 -170 MHz
Power:	
Pass Band:	50 W CW
Stop Band:	10 W CW
Insertion Loss:	
Pass Band:	0.5 dB Max.
Rejection:	
300-1500 MHz:	50 dB Min.
VSWR:	
10-170 MHz:	1.25:1 Max.
170-1500 MHz:	1.90:1 Max.


**Connector Configurations**

Model	J1 (Input/Output)	J2 (Input/Output)
AF9255-102	SMA	SMA

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

**Insertion Loss & Band Rejection:**

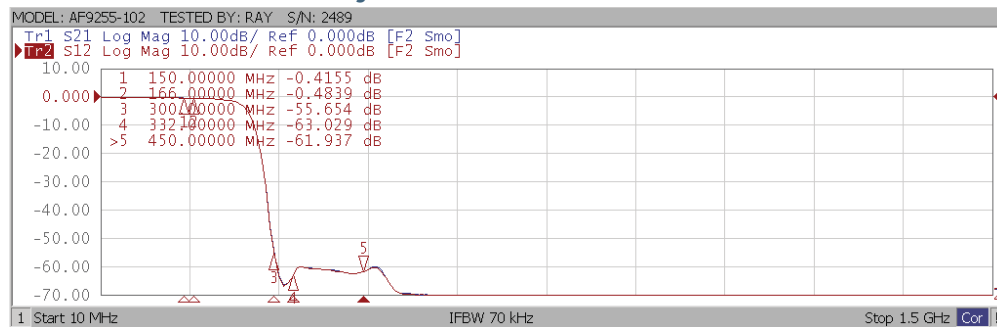

**Return Loss:**

