




0.8-3.5GHz 300W High Power 3-Way Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- High power handling capability
- * 300W average input when work as combiner.



Electrical Specifications				
Frequency Range (MHz)	Insertion Loss (dB. max)	Isolation (dB. min)	VSWR	Working Temp. Range (° C)
800~3500	0.25	6 (as combiner)	1.25:1	-20~+70
Average Power (W)	Peak Power (KW)	Connector	Storage Temp. Range (° C)	Dimension unit
300(CW)	3	N-F	-40~+70	mm [inch]



Insertion loss

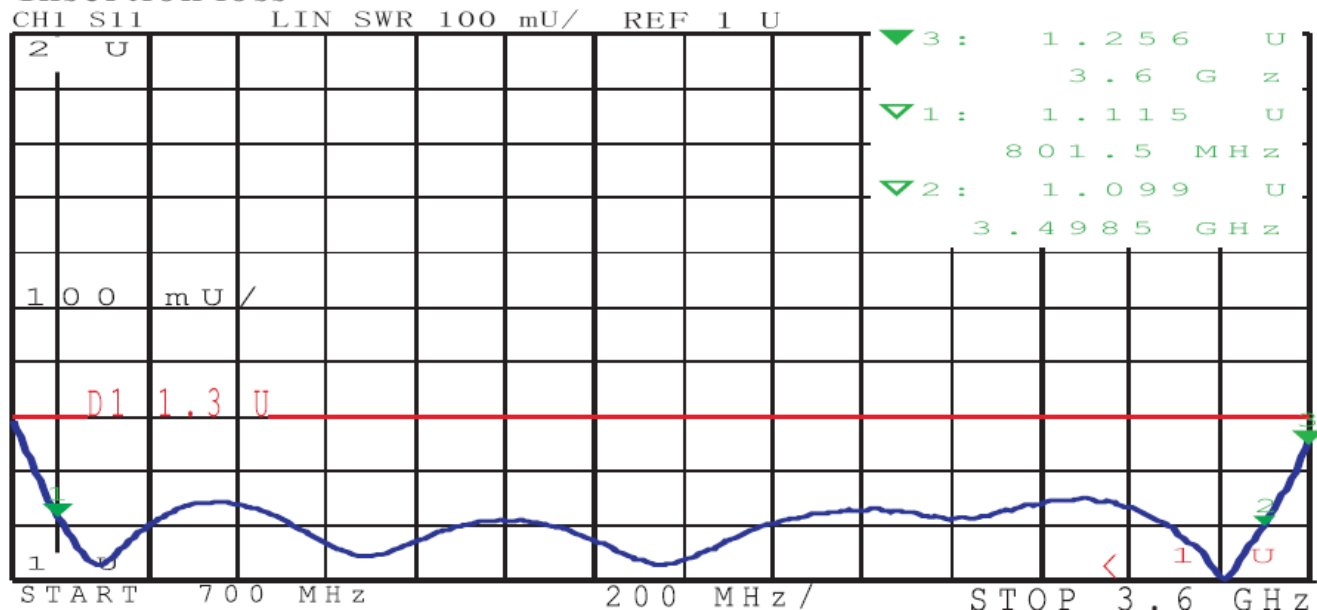

0.8-3.5GHz 300W High Power 3-Way Power Divider



VSWR(in)

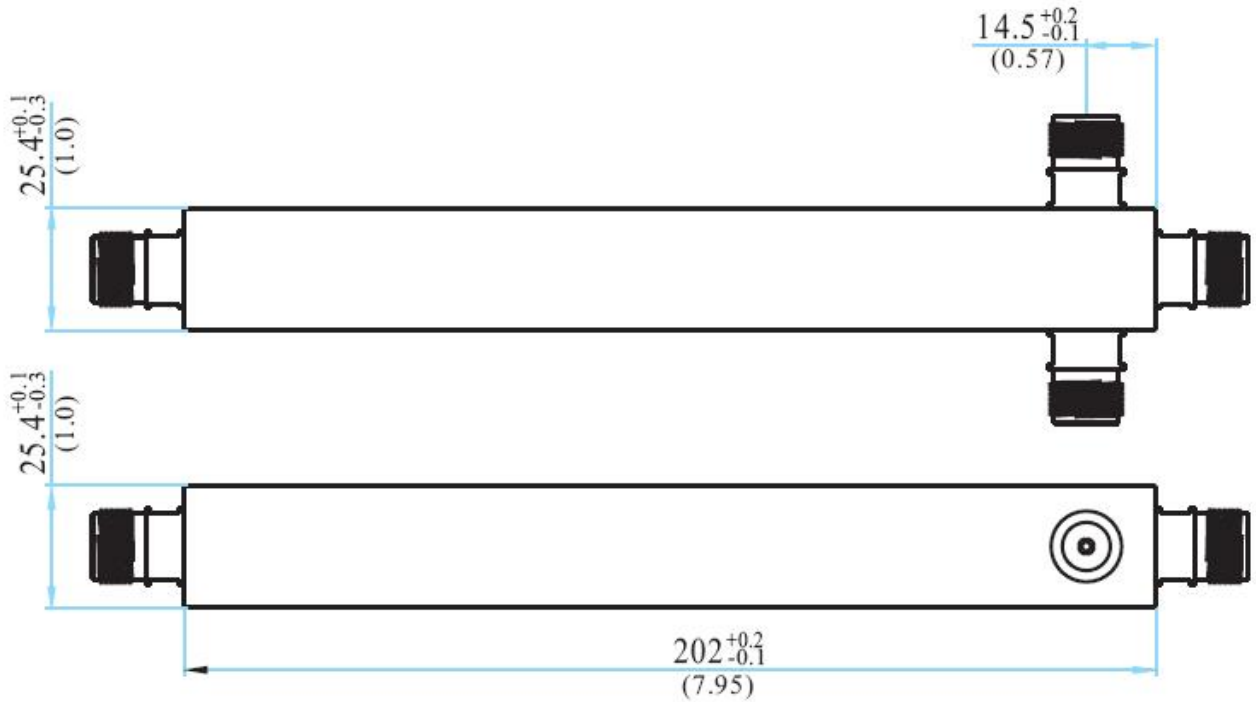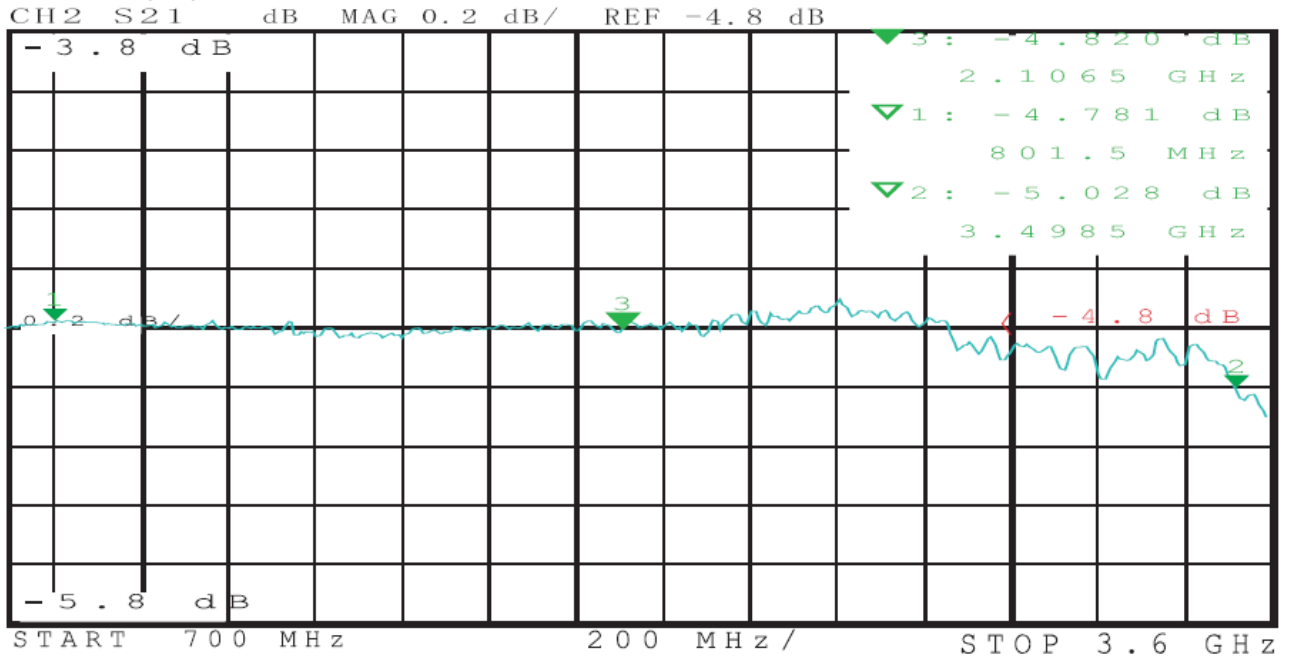

0.8-3.5GHz 300W High Power 3-Way Power Divider