

5IB10-4750/T800-PX/PX & 5IB10-7800/T800-PX/PX Bandpass Filter

◆ Features:

- Low Profile
- Surface Mount
- High Frequency, Lumped Element


◆ Specifications:

f_0 :	4750 & 7800 MHz
3.0 dB BW:	800 MHz
Insertion Loss:	<2.0 dB
Rejection:	5 Pole response
Max power:	+10 dBm
Size:	1.0"L x 0.3"W x 0.24"H




◆ Applications:

- Military & Commercial Airborne
- Secure Ground and Airborne Communications
- Ground Base Radar

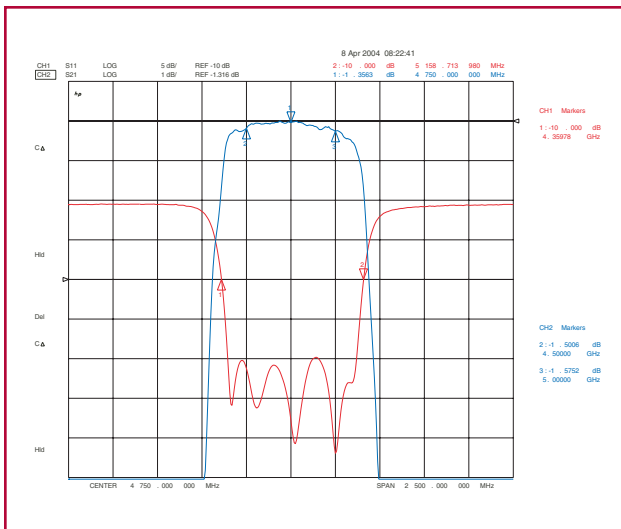

5IB10-4750 Passband

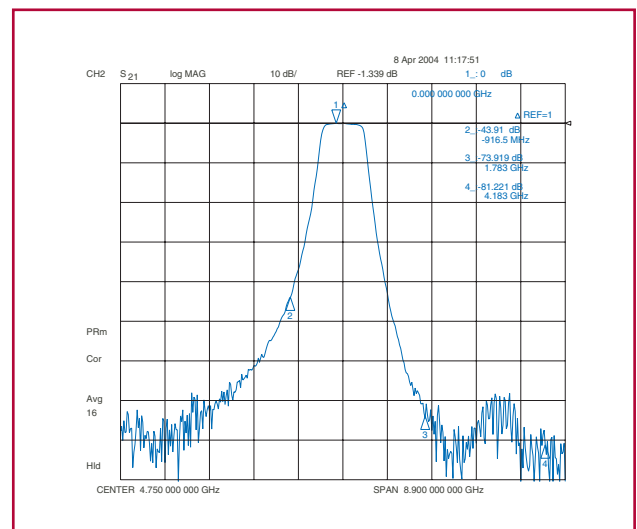

5IB10-4750 Outer Band Rejection

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com


EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com


Order On-Line @ www.klmicrowave.com



5IB10-4750/T800-PX/PX & 5IB10-7800/T800-PX/PX Bandpass Filter

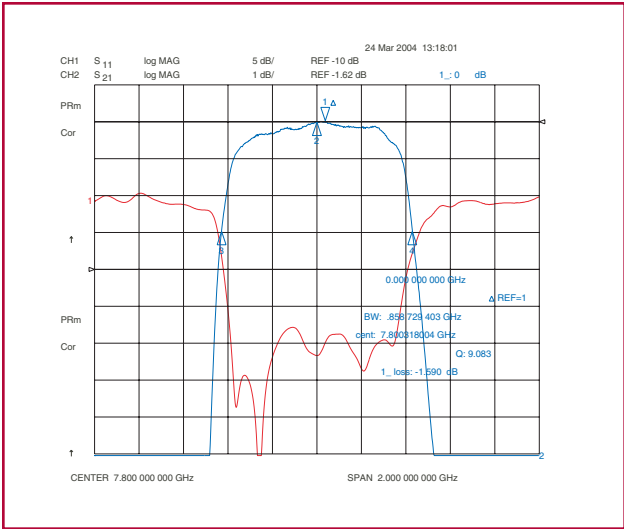

5IB10-7800 Passband

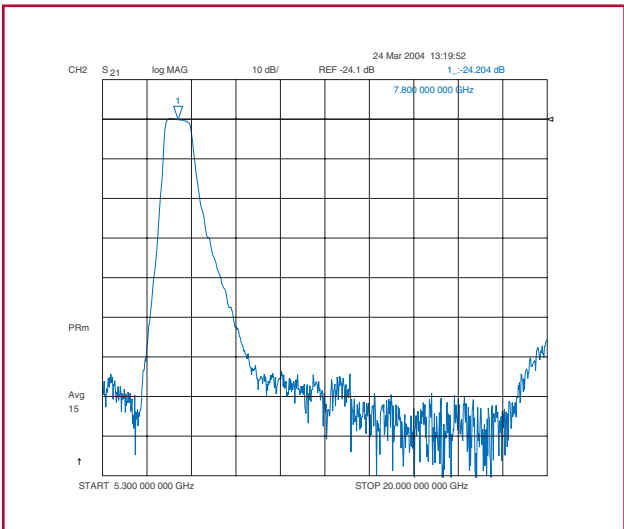

5IB10-7800 Outer Band Rejection

Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

