





Standards  
NF C 96-315  
MIL-DTL-3933

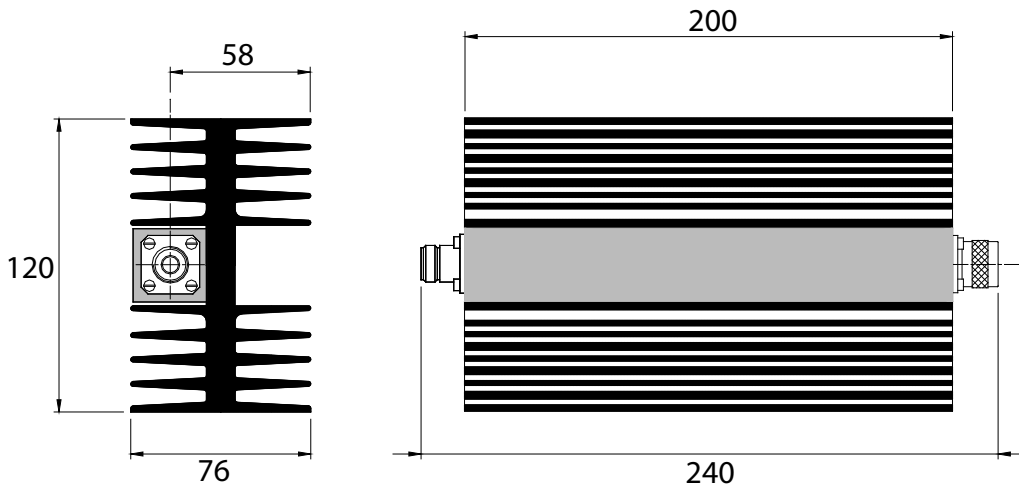

Impedance	50 Ω ± 5%
Frequency	DC - 4 GHz
Max VSWR	≤ 1.20 à 2 GHz, ≤ 1.30 à 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	150 W
Weight	2 kg

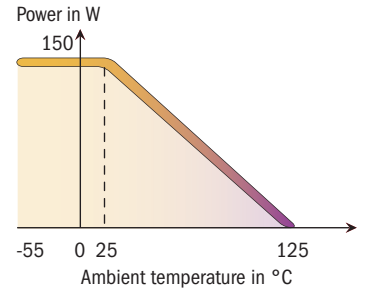

Dimensions in mm

Attenuation (dB)	P/N (N m/f)	Accuracy ±Δα (dB)
3	16-6759	0.5
6	16-6767	0.5
10	16-6760	1
20	16-6848	1
30	16-6761	1
40	16-6775	1

Model available with 7-16 connector  
Others attenuations on request

