
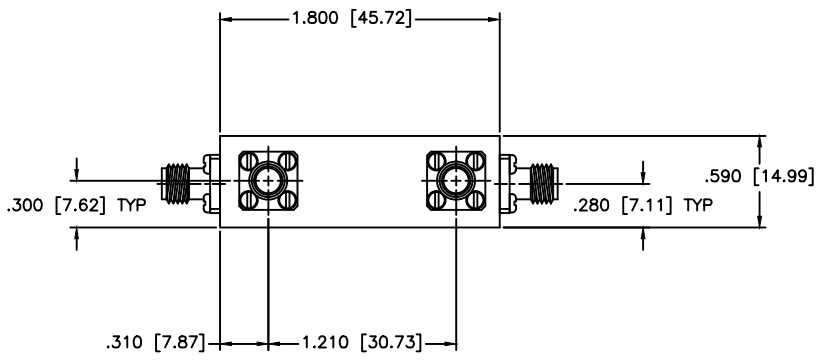


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

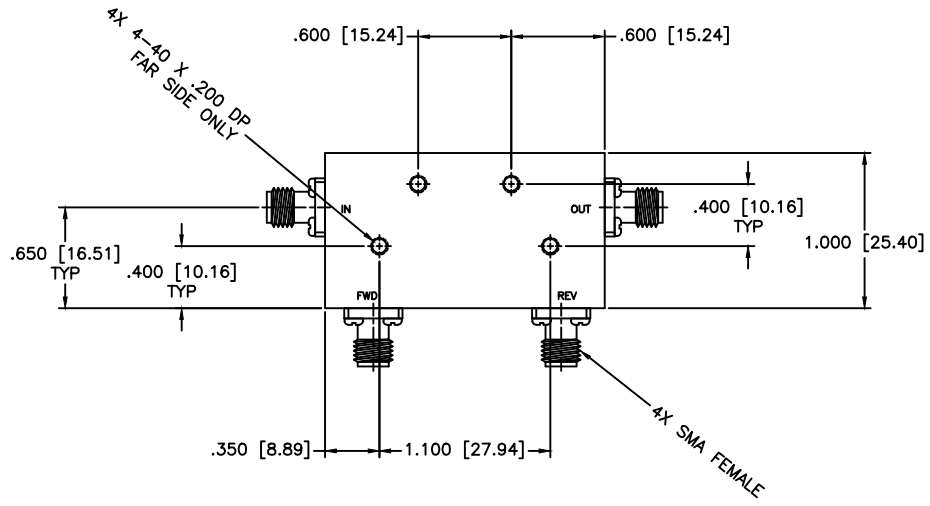

SPECIFICATIONS

- FREQUENCY RANGE: 600–6000 MHz
- FLATNESS: ± 1.0 dB Max.
- INSERTION LOSS: 0.70dB Max.
- DIRECTIVITY: 15dB Min.
- VSWR: 1.25:1 Max.
- POWER: 100W CW
- COUPLING: 30dB

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
DRAWN:		DATE:		PART NO.		HDL-33-30
Paiboon Luekhamhan		05-21-2008		CAGE CODE:		
APPROVED:		DATE:		SIZE:		DO NOT SCALE THE DRAWING
T. Nguyen		05-21-2008		A		80555
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV:		N/A
				DWG NO.		80555