




### N 2-Way Power Divider 2-8GHz



#### Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner \*
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- High power handling capability
- \* 5W maximum input when work as combiner.

Electrical Specifications				
Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Phase unbalance (degree)	Amplitude Unbalance (dB)
2.0-8.0	0.7	20	4.0	0.3
Forward Power (W)	Impedance (Ω)	Reverse Power (W)	Input VSWR	Output VSWR
30	50	2	1.35	1.3

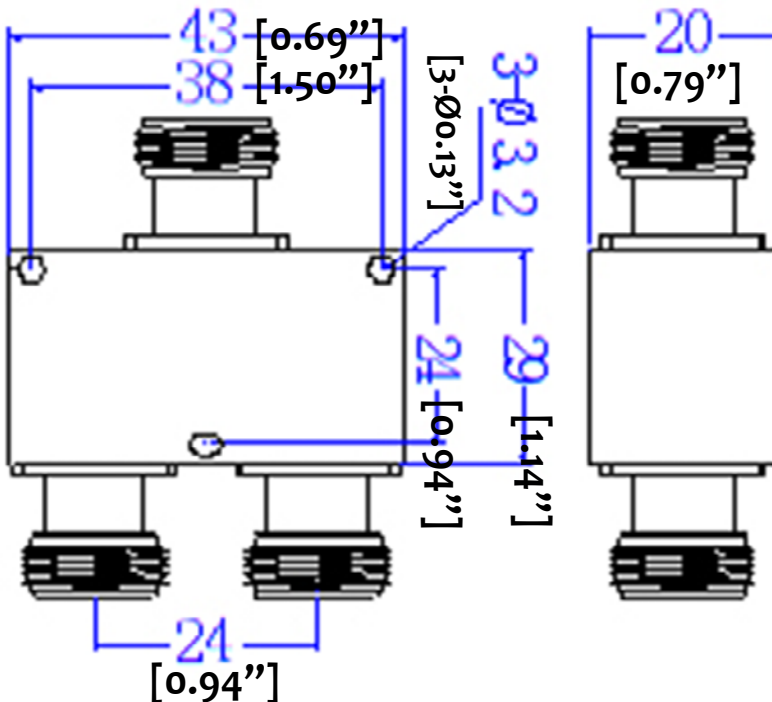

#### Environmental Specifications:

- Operating Temperature: -30 °C~+70° C
- Storage Temperature: -55 °C~+95° C
- Applications: indoor,0-95% ° C

