

**Key Features:**


- Frequency range: 6.0~18.0GHz full band
- Small size, low cost
- Power handling >10Watts forward, >10Watt termination
- Operating temperature -40~+71°C
- Customer specify center frequency and bandwidth for narrower band requirements

**Electrical Specifications**

| Part No.      | Freq Range GHz | Insertion Loss, dB | Reverse Isolation, dB | VSWR    | Forward Power, Watts | Reverse Termination, Watts | Temp. Range, °C |
|---------------|----------------|--------------------|-----------------------|---------|----------------------|----------------------------|-----------------|
| F2200-1200-A0 | 6.0-18.0       | 1.5 Max            | 11.0 Min              | ≤ 1.9:1 | ≥ 10                 | ≥ 10                       | -40 ~ +71       |

Note: Reverse 10 Watt CW operation requires external heat sink for heat dissipation.

**Mechanical Structure:**

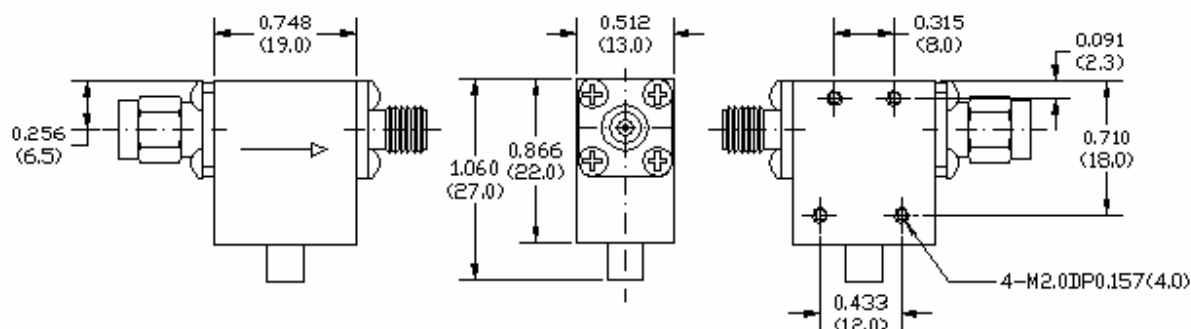

Note: All units in inches (mm).

**Ordering Information:**

