


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

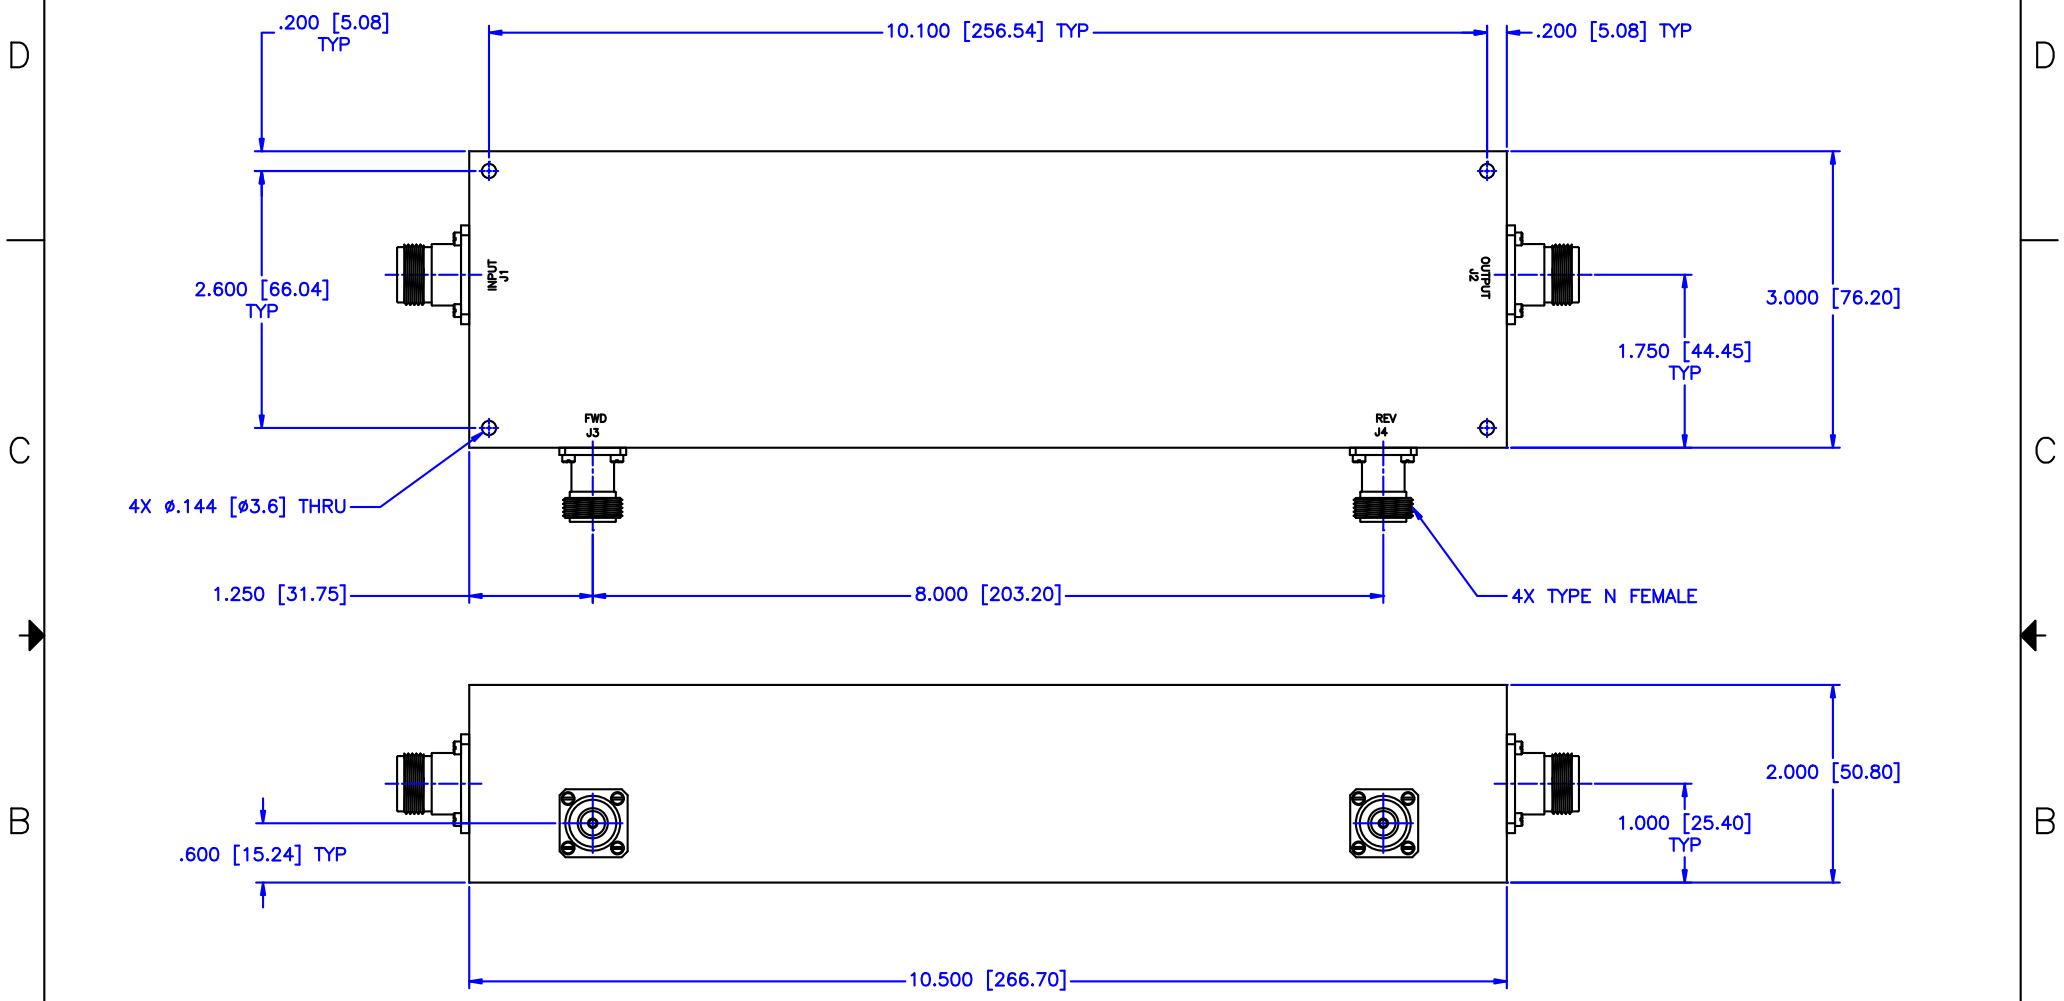

**SPECIFICATIONS**  
 FREQUENCY RANGE: 0.01–250 MHz  
 FLATNESS:  $\pm 0.75$ dB Max.  
 INSERTION LOSS: 0.40dB Max.  
 DIRECTIVITY: 20dB Min.  
 VSWR: 1.25:1 Max.  
 POWER: 1000 Watts CW

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>HIGH POWER DUAL DIRECTIONAL COUPLER</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: HDL-3-40/1000	
DATE: 02-27-2008		CAGE CODE: OD2L5	SIZE: C
APPROVED: T. Nguyen		DATE: 02-27-2008	REV: N/A
THIRD ANGLE PROJECTION		DWG NO.: 83068	
DO NOT SCALE THE DRAWING			